



This certificate is not valid if the serial number has been defaced or altered

29661887

EICR18.2c

ELECTRICAL INSTALLATION CONDITION REPORT

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

Original (to the person ordering the work)

PART 1 : DETAILS OF THE CONTRACTOR, CLIENT AND INSTALLATION

DETAILS OF THE CONTRACTOR	(*Where applicable)	DETAILS OF THE CLIENT	DETAILS OF THE INSTALLATION
Registration No: 609526000	Branch No*: 000	Contractor Reference Number (CRN): N/A	Occupier: N/A
Trading Title: Andrew D'auria Solutions Limited T/A AD Gas		Name: Pobl	UPRN: N/A
Address: 197 Neath Road, Landore, Swansea, West Glamorgan		Address: POBL House, Phoenix Way, Swansea Enterprise park, Swansea	Address: Block Oxwich, Swansea University, Singleton Park, Swansea
Postcode: SA1 2JT	Tel No: 01792701074	Postcode: SA7 9EX	Tel No: N/A

PART 2 : PURPOSE OF THE REPORT

Purpose for which this report is required:
To determine if the installation is safe for continued use.

Date(s) when inspection and testing was carried out: 04/04/2024 - 16/05/2024

Records available (651): (X)

Previous inspection report available (651): (X)

Previous report date: (N/A)

PART 3 : SUMMARY OF THE CONDITION OF THE INSTALLATION

General condition of the installation (in terms of electrical safety): Metallic Main Consumer Unit supplying x5 metallic Consumer Units. Main Earthing Conductor is 35mm. Water Bond is in 25mm at the Water stop tap. Gas Bond is in 25mm at MET. General condition of the installation is safe for continued use. DB External Ltg no longer in use, cables disconnected from DB.

Description of premises Dwelling: (N/A) Commercial: (✓) Industrial: (N/A) Other (include brief description): (N/A)

Estimated age of electrical installation: (10) years Evidence of additions or alterations: (✓ if Yes, estimated age 1) years Overall assessment of the installation for continued use: ~~Satisfactory~~ **Unsatisfactory**** (delete as appropriate)

**An unsatisfactory assessment indicates that dangerous (Code C1) and/or potentially dangerous (Code C2) conditions have been identified (listed in PART 5 of this report) and it is recommended that these are acted upon as a matter of urgency.

PART 4 : DECLARATION

INSPECTION AND TESTING

I/We, being the person responsible for the inspection and testing of the electrical installation (as indicated by my/our signature below), particulars of which are described in PART 6, having exercised reasonable skill and care when carrying out the inspection and testing, hereby declare that the information in this report, including the observations (PART 5) and the attached Schedules, provides an accurate assessment of the condition of the electrical installation taking into account the stated extent and limitations in PART 6 of this report.

Name (capitals) on behalf of the contractor identified in PART 1: LEE WELSHER Signature: [Signature] Date: 16/05/2024

I/We further RECOMMEND, subject to the necessary remedial action being taken, that the installation is inspected and tested by: 16/05/2029 (date)

Give reason for recommendation: As Per advice given in Guidance Note 3. No adverse findings during the inspection.

The proposed date for the next inspection should take into consideration any legislative or licensing requirements and the frequency and quality of maintenance that the installation can reasonably be expected to receive during its intended life. The period should be agreed between relevant parties.

REVIEWED BY THE REGISTERED QUALIFIED SUPERVISOR FOR THE CONTRACTOR

Name (capitals) on behalf of the contractor identified in PART 1: JORDAN STEEL Signature: [Signature] Date: 20/05/2024

ELECTRICAL INSTALLATION CONDITION REPORT

Issued in accordance with BS 7671: 2018+A2:2022 – Requirements for Electrical Installations

PART 5 : OBSERVATIONS

One of the following Codes, as appropriate, has been allocated to each of the observations made below to indicate to the person(s) responsible for the electrical installation the degree of urgency for remedial action:	Code C1 Danger Present Risk of injury. Immediate remedial action required	Code C2 Potentially Dangerous Urgent remedial action required	Code C3 Improvement Recommended	Code FI Further Investigation Required
---	---	---	---	--

Referring to the **Schedule of Items Inspected** (see PART 9), the attached **Schedule of Circuit Details and Test Results** (see PART 11A & 11B), and subject to any **agreed limitations** listed in PART 6 –

No remedial action is required (), OR The following observations are made:

Item No	Observation(s)	Code	Location Reference
(1)	(6.7 ZS values for circuits 6L2,6L3,7L2,8L1,8L2 exceed the 80% maximum zs values in BS7671 but do not exceed the 100% values with 30mA RCD protection.)	(C3)	(DB1)
(2)	(6.8 Ring mains wired in 4mm/1.5mm T+E. CPC-CPC readings do not exceed 2.67 times the Live-Live readings.)	(C3)	(DB1)
(3)	(6.13All DB's - No Rcd protection for circuits with cable in walls.)	(C3)	(All Consumer Units)
(4)	(No SPD in Consumer Units.)	(C3)	(All Consumer Units)
(5)	(Emergency Fire Exit sign in K2 corridor has missing blade.)	(✓)	(1K2)
(6)	(Faulty emergency kosnic light fitting on stairwell, needs replacing.)	(✓)	(Stairwell)
(7)	(Damaged emergency exit sign bracket in corridor.)	(✓)	(Floor 4)
(8)	(All DB's - Rectified IP4x breach at top side of all DB's.)	(✓)	(All Consumer Units)
(9)	(Installed RCBO pods to provide rcd protection to all accommodation lighting circuits supplying lighting in bathrooms)	(✓)	(All Consumer Units)
(10)	(Installed RCBO pods to provide rcd protection to all cooker circuits supplying socket outlets)	(✓)	(All consumer units)
(11)	(Installed choc box protection to all exposed connections above ceilings.)	(✓)	(All Floors)
(12)	(Replaced damaged Fire alarm supply FCU.)	(✓)	(Ground Floor)
(13)	(Removed all redundant spotlights and replaced ceilings tiles.)	(✓)	(All Floors)
(14)	(Replaced faulty PIR motion sensor in K1 corridor.)	(✓)	(1K1)
(15)	(Replaced faulty ceiling tile light and power pack.)	(✓)	(Floor 2)
(16)	(Replaced damaged double socket outlet in room 215.)	(✓)	(Room 215)
(17)	(New Bond Clamp fitted to Water service.)	(✓)	(Water Bond.)
(18)	(6.8 Ring mains wired in 4mm/1.5mm T+E. CPC-CPC readings do not exceed 2.67 times the Live-Live readings.)	(C3)	(DB2)
(19)	(6.8 Ring mains wired in 4mm/1.5mm T+E. CPC-CPC readings do not exceed 2.67 times the Live-Live readings.)	(C3)	(DB3)
(20)	(6.8 Ring mains wired in 4mm/1.5mm T+E. CPC-CPC readings do not exceed 2.67 times the Live-Live readings.)	(C3)	(DB4)

Additional pages? (Yes) State page numbers: (45)

Immediate remedial action required for items: (N/A)

Improvement recommended for items: (1,2,3,4,18,19,20)

Urgent remedial action required for items: (N/A)

Further investigation required for items: (N/A)

ELECTRICAL INSTALLATION CONDITION REPORT

Issued in accordance with BS 7671: 2018+A2:2022 – Requirements for Electrical Installations

PART 6 : DETAILS AND LIMITATIONS OF THE INSPECTION AND TESTING

The inspection and testing has been carried out in accordance with BS 7671: 2018, as amended to 2022 (date). Cables concealed within trunking and conduits, or cables and conduits concealed under floors, in inaccessible roof spaces and generally within the fabric of the building or underground, have not been visually inspected unless specifically agreed between the Client and the Inspector prior to inspection.

Details of the electrical installation covered by this report: **All fixed wiring from associated distribution board within building.**

Agreed limitations including the reasons, if any, on the inspection and testing (653.2): **Insulation Resistance tested between LN-E of each circuit. No testing of heating control circuits. Visual inspection of the Suppliers equipment only. No disturbance to fabric of the Building.**

Extent of sampling: **20% of accessories. Inspection and test of Consumer Unit. Main protective bonding conductors and final circuits.**

Operational limitations including the reasons: **No access to Lift supplies/Isolators on roof.**

Agreed with (print name): **CLIENT**

PART 7 : SUPPLY CHARACTERISTICS AND EARTHING ARRANGEMENTS

System type and earthing arrangements			Number and type of live conductors			Nature of supply parameters	
TN-C: (N/A)	TN-S: (N/A)	TN-C-S: (N/A)	AC 1-phase, 2-wire: (N/A)	2-phase, 3-wire: (N/A)	Nominal voltage between lines, U_{ll} : (400) V Nominal line voltage to Earth, U_o [1]: (230) V Nominal frequency, f [1]: (50) Hz Prospective fault current, I_{pf} [2]*: (5.2) kA External earth fault loop impedance, Z_e [2]*: (0.09) Ω		
TT: (N/A)	IT: (N/A)		3-phase, 3-wire: (N/A)	3-phase, 4-wire: (✓)			
Supply protective device			DC 2-wire: (N/A)	3-wire: (N/A)	Other: (N/A)	[1] By enquiry [2] By enquiry or by measurement	
BS EN: (LIM)	Type: (N/A)	Rated current: (LIM) A	Confirmation of supply polarity: (✓)				
			Other sources of supply (Schedule of Test Results)			Page No: (N/A)	

PART 8 : PARTICULARS OF INSTALLATION REFERRED TO IN THIS REPORT

Means of Earthing	Main protective conductors	Main protective bonding connections	Main switch / Switch-fuse / Circuit-breaker / RCD
Maximum demand (load): (N/A) kVA/ⓧ (delete as appropriate)	Earthing conductor: (material Copper)	Water installation pipes: (✓)	Location: (Meter Room)
Distributor's facility: (✓)	csa (35) mm ² Connection/continuity verified: (NA)	Gas installation pipes: (✓)	BS EN: (60947-2) Type: () Rating / setting of device: (N/A) A
Installation earth electrode(s): (N/A)	Main protective bonding conductors: (material Copper)	Structural steel: (N/A)	No. of poles: (3) Current rating: (125) A Voltage rating: (400) V
Earth electrode type - rod(s), tape, etc: (None)	csa (25) mm ² Connection/continuity verified: (NA)	Oil installation pipes: (N/A)	Where an RCD is used as the main switch
Location: (N/A)		Lightning protection: (✓)	RCD rated residual operating current, $I_{\Delta n}$: (N/A) mA RCD Type: (N/A)
Electrode resistance to Earth: (N/A) Ω		Other (state): (N/A)	Rated time delay: (N/A) ms Measured operating time: (N/A) ms
		(N/A)	

*Where the installation is supplied by more than one source, the higher or highest values of prospective fault current, I_{pf} , and external earth fault loop impedance, Z_e , must be recorded.

All fields must be completed. Enter either, as appropriate: '✓' if Acceptable condition; 'N/A' if Not applicable; 'LIM' if a Limitation exists, or Code appropriately: CODE 'C1', 'C2', 'C3' or 'FI' (codes to be recorded in PART 5, with additional comments (where appropriate) on attached numbered sheets)

Original (to the person ordering the work)

ELECTRICAL INSTALLATION CONDITION REPORT

Issued in accordance with BS 7671: 2018+A2:2022 – Requirements for Electrical Installations

PART 9 : SCHEDULE OF ITEMS INSPECTED (enter ✓, N/A or Classification Code C1, C2, C3 or FI, as applicable)

1.0 Intake equipment (visual inspection only) <i>An outcome against an item in section 1.1, other than access to live parts, should not be used to determine the overall assessment of the installation. Where inadequacies are identified, a cross should be put against the appropriate item and a comment made in Part 5 of this report.</i>		<ul style="list-style-type: none"> ▪ Accessibility of all protective bonding connections (543.3.2) (.....✓) ▪ Provision of earthing / bonding labels at all appropriate locations (514.13.1) (.....✓) 	4.16 Confirmation that integral test button / switch, where present, causes AFDD to trip when operated (643.10) (N/A.....)
1.1 Distributor / supplier intake equipment	<ul style="list-style-type: none"> ▪ Service cable (.....✓) ▪ Service head (.....✓) ▪ Earthing arrangement (.....✓) ▪ Meter tails (.....✓) ▪ Metering equipment (.....✓) ▪ Isolator, where present (N/A.....) 	3.2 FELV - requirements satisfied (411.7) (N/A.....)	4.17 Presence of diagrams, charts or schedules at or near equipment, where required (514.9.1) (.....✓)
<i>Where inadequacies in the intake equipment are encountered, which may result in a dangerous or potentially dangerous situation, the person ordering the work and / or dutyholder must be informed. It is strongly recommended that the person ordering the work informs the appropriate authority.</i>	1.2 Consumer's isolator, where present (N/A.....)	3.3 Other methods of protection <i>Where any of the methods listed below are employed, details should be provided on separate sheets</i>	4.18 Presence of alternative supply warning notice at or near equipment, where required (514.15) (N/A.....)
1.3 Consumer's meter tails (.....✓)	2.0 Presence of adequate arrangements for parallel or switched alternative sources	<ul style="list-style-type: none"> ▪ Non-conducting location (418.1) (N/A.....) ▪ Earth-free local equipotential bonding (418.2) (N/A.....) ▪ Electrical separation (413; 418.3) (.....✓) ▪ Double insulation (412) (.....✓) ▪ Reinforced insulation (412) (N/A.....) ▪ Provisions where automatic disconnection of supply is not feasible (419) (N/A.....) 	4.19 Presence of next inspection recommendation label, where required (514.12.1) (.....✓)
2.1 Adequate arrangements where a generating set operates as a switched alternative to the public supply (551.6) (N/A.....)	2.2 Adequate arrangements where a generating set operates in parallel with the public supply (551.7) (N/A.....)	4.0 Distribution equipment, including consumer units and distribution boards	4.20 Presence of other required labelling (please specify) (514) (.....✓)
3.0 Methods of protection	3.1 Automatic disconnection of supply (ADS)	4.1 Adequacy of working space / accessibility to equipment (132.12; 513.1) (.....✓)	4.21 Compatibility of protective devices, bases and other components; correct type and rating (no signs of unacceptable thermal damage, arcing or overheating) (432; 433; 434) (.....✓)
<ul style="list-style-type: none"> ▪ Main earthing / bonding arrangement (411.3; Chap. 54) (.....✓) ▪ Presence of distributor's earthing arrangement (542.1.2.1; 542.1.2.2), or presence of installation earth electrode arrangement (542.1.2.3) (N/A.....) ▪ Adequacy of earthing conductor size (542.3; 543.1.1) (.....✓) ▪ Adequacy of earthing conductor connections (542.3.2) (.....✓) ▪ Accessibility of earthing conductor connections (543.3.2) (.....✓) ▪ Adequacy of main protective bonding conductor sizes (544.1.1) (.....✓) ▪ Adequacy and location of main protective bonding conductor connections (544.1.2) (.....✓) 	3.2 Security of fixing (134.1.1) (.....✓)	4.22 Single-pole switching or protective devices in line conductors only (132.14.1; 530.3.3) (.....✓)	4.22 Confirmation that ALL conductor connections, including connections to busbars, are correctly located in terminals and are tight and secure (526.1) (.....✓)
3.2 Presence of adequate arrangements for parallel or switched alternative sources (N/A.....)	3.3 Condition of insulation of live parts (416.1) (.....✓)	4.23 Protection against mechanical damage where cables enter equipment (522.8.1; 522.8.5; 522.8.11) (.....✓)	5.0 Distribution circuits
3.3 Adequacy security of barriers or enclosures (416.2.3) (.....✓)	4.4 Adequacy of enclosure(s) in terms of IP rating, etc. (416.2) (.....✓)	4.24 Protection against electromagnetic effects where cables enter ferromagnetic enclosures (521.5.1) (.....✓)	5.1 Identification of conductors (514.3) (.....✓)
3.4 Condition of enclosure(s) in terms of fire rating, etc. (421.1.201; 421.1.6; 526.5) (.....✓)	4.5 Enclosure not damaged / deteriorated so as to impair safety (651.2) (.....✓)	4.25 Confirmation that ALL conductor connections, including connections to busbars, are correctly located in terminals and are tight and secure (526.1) (.....✓)	5.2 Cables correctly supported throughout their run (521.10.202; 522.8.5) (LIM.....)
3.5 Enclosure not damaged / deteriorated so as to impair safety (651.2) (.....✓)	4.6 Presence and effectiveness of obstacles (417.2) (N/A.....)	5.1 Identification of conductors (514.3) (.....✓)	5.3 Condition of insulation of live parts (416.1) (.....✓)
3.6 Presence and effectiveness of obstacles (417.2) (N/A.....)	4.7 Presence of main switch(es), linked where required (462.1; 462.1.201; 462.2) (.....✓)	5.2 Cables correctly supported throughout their run (521.10.202; 522.8.5) (LIM.....)	5.4 Non-sheathed cables protected by enclosure in conduit, ducting or trunking (521.10.1) (N/A.....)
3.7 Presence of main switch(es), linked where required (462.1; 462.1.201; 462.2) (.....✓)	4.8 Operation of main switch(es) (functional check) (643.10) (.....✓)	5.3 Condition of insulation of live parts (416.1) (.....✓)	5.5 Suitability of containment systems for continued use (including flexible conduit) (522) (.....✓)
3.8 Manual operation of circuit-breakers, RCDs and AFDDs to prove functionality (643.10) (.....✓)	4.9 Confirmation that integral test button / switch causes RCD(s) to trip when operated (functional check) (643.10) (.....✓)	5.4 Non-sheathed cables protected by enclosure in conduit, ducting or trunking (521.10.1) (N/A.....)	5.6 Cables correctly terminated in enclosures (526) (.....✓)
3.9 Confirmation that integral test button / switch causes RCD(s) to trip when operated (functional check) (643.10) (.....✓)	4.10 RCD(s) provided for fault protection - includes RCBOs (411.4.204; 411.4.5; 411.5.2; 531.2) (N/A.....)	5.5 Suitability of containment systems for continued use (including flexible conduit) (522) (.....✓)	5.7 Examination of cables for signs of unacceptable thermal or mechanical damage / deterioration (421.1; 522.6) (.....✓)
3.10 RCD(s) provided for fault protection - includes RCBOs (411.4.204; 411.4.5; 411.5.2; 531.2) (N/A.....)	4.11 RCD(s) provided for additional protection / requirements, where required - includes RCBOs (411.3.3; 415.1) (.....✓)	5.6 Cables correctly terminated in enclosures (526) (.....✓)	5.8 Adequacy of cables for current-carrying capacity with regard for the type and nature of installation (523) (.....✓)
3.11 RCD(s) provided for additional protection / requirements, where required - includes RCBOs (411.3.3; 415.1) (.....✓)	4.12 Presence of RCD six-monthly test notice, where required (514.12.2) (.....✓)	5.7 Examination of cables for signs of unacceptable thermal or mechanical damage / deterioration (421.1; 522.6) (.....✓)	
3.12 Presence of RCD six-monthly test notice, where required (514.12.2) (.....✓)		5.8 Adequacy of cables for current-carrying capacity with regard for the type and nature of installation (523) (.....✓)	

Original (to the person ordering the work)

ELECTRICAL INSTALLATION CONDITION REPORT

Issued in accordance with BS 7671: 2018+A2:2022 – Requirements for Electrical Installations

PART 9 : SCHEDULE OF ITEMS INSPECTED (enter ✓, N/A or Classification Code C1, C2, C3 or FI, as applicable)

5.9	Adequacy of protective devices; type and rated current for fault protection (411.3)	(.....) ✓	6.2	Cables correctly supported throughout their run (521.10.202; 522.8.5)	LIM (.....) ✓	<ul style="list-style-type: none"> *For cables concealed in walls / partitions containing metal parts regardless of depth (522.6.203) *For final circuits supplying luminaires within domestic (household) premises (411.3.4) 	N/A (.....)	
5.10	Presence and adequacy of circuit protective conductors (411.3.1.1; 543.1)	(.....) ✓	6.3	Condition of insulation of live parts (416.1)	(.....) ✓			N/A (.....)
5.11	Coordination between conductors and overload protective devices (433.1; 533.2.1)	(.....) ✓	6.4	Non-sheathed cables protected by enclosure in conduit, ducting or trunking (521.10.1)	(N/A) (.....)			
5.12	Cable installation methods / practices with regard to the type and nature of installation and external influences (522)	(.....) ✓	6.5	Suitability of containment systems for continued use (including flexible conduit) (522)	(.....) ✓	*Older installations designed prior to BS 7671: 2018 may not have required RCDs for additional protection.		
5.13	Where exposed to direct sunlight, cable of a suitable type (522.11.1)	(N/A) (.....)	6.6	Adequacy of cables for current-carrying capacity with regard to the type and nature of installation (523)	(.....) ✓	6.14	Provision of fire barriers, sealing arrangements and protection against thermal effects (527)	(.....) ✓
5.14	Cables concealed under floors, above ceilings, in walls / partitions, adequately protected against damage (522.6.201; 522.6.202; 522.6.203; 522.6.204) –		6.7	Adequacy of protective devices; type and rated current for fault protection (411.3)	C3 (.....)	6.15	Band II cables segregated / separated from Band I cables (528.1)	LIM (.....)
	▪ Installed in prescribed zones (see Section D. <i>Extent and limitations</i>) (522.6.202)	LIM (.....)	6.8	Presence and adequacy of circuit protective conductors (411.3.1.1; 543.1)	C3 (.....)	6.16	Cables segregated / separated from non-electrical services (528.3)	LIM (.....)
	▪ Incorporating earthed armour or sheath, or run within earthed wiring system, or otherwise protected against mechanical damage by nails, screws and the like (see Section D) (522.6.201; 522.6.204)	(.....) ✓	6.9	Co-ordination between conductors and overload protective devices (433.1; 533.2.1)	(.....) ✓	6.17	Termination of cables at enclosures - identify / record numbers and locations of items inspected (526) –	
5.15	Provision of fire barriers, sealing arrangements and protection against thermal effects (527)	(.....) ✓	6.10	Wiring system(s) appropriate for the type and nature of the installation and external influences (522)	(.....) ✓		▪ Connection under no undue strain (526.6)	(.....) ✓
5.16	Band II cables segregated / separated from Band I cables (528.1)	LIM (.....)	6.11	Where exposed to direct sunlight, cable of a suitable type (522.11.1)	(N/A) (.....)		▪ No basic insulation of a conductor visible outside enclosure (526.8)	(.....) ✓
5.17	Cables segregated / separated from non-electrical services (528.3)	LIM (.....)	6.12	Cables concealed under floors, above ceilings, in walls / partitions, adequately protected against damage (522.6.201; 522.6.202; 522.6.203; 522.6.204) –			▪ Connections of live conductors adequately enclosed (526.5)	(.....) ✓
5.18	Condition of circuit accessories (651.2)	(.....) ✓		▪ Installed in prescribed zones (see Section D. <i>Extent and limitations</i>) (522.6.202)	LIM (.....)		▪ Adequately connected at point of entry to enclosure (glands, bushes, etc.) (522.8.5)	(.....) ✓
5.19	Suitability of circuit accessories for external influences (512.2)	(.....) ✓		▪ Incorporating earthed armour or sheath, or run within earthed wiring system, or otherwise protected against mechanical damage by nails, screws and the like (see Section D) (522.6.201; 522.6.204)	(N/A) (.....)	6.18	Condition of accessories including socket-outlets, switches and joint boxes (651.2)	(.....) ✓
5.20	Single-pole switching or protective devices in line conductors only (132.14.1; 530.3.3)	(.....) ✓	6.13	Provision of additional protection by RCD having rated residual operating current not exceeding 30 mA –		6.19	Suitability of accessories for external influences (512.2)	(.....) ✓
5.21	Adequacy of connections, including cpcs, within accessories and to fixed and stationary equipment - identify / record numbers and locations of items inspected (526)	(.....) ✓		▪ *For all socket-outlets of rating 32 A or less (411.3.3)	(.....) ✓	6.20	Single-pole switching or protective devices in line conductors only (132.14.1; 530.3.3)	(.....) ✓
5.22	Presence, operation and correct location of appropriate devices for isolation and switching (Chap. 46; 537)	(.....) ✓		<i>Additional protection by RCD may not have been provided as a noted exception in certain non-domestic installations covered by indent (ii) of Regulation 411.3.3.</i>		7.0 Isolation and switching		
5.23	General condition of wiring system (651.2)	(.....) ✓		▪ *For the supply of mobile equipment not exceeding 32 A rating for use outdoors (411.3.3)	(.....) ✓	7.1	Isolators –	
5.24	Temperature rating of cable insulation (522.1.1; Table 52.1)	(N/A) (.....)		▪ *For cables concealed in walls at a depth of less than 50 mm (522.6.202)	C3 (.....)		▪ Presence and condition of appropriate devices (462; 537.2)	(.....) ✓
6.0 Final circuits							▪ Acceptable location - state if local or remote from equipment in question (462; 537.2.7)	(.....) ✓
6.1	Identification of conductors (514.3)	(.....) ✓					▪ Capable of being secured in the OFF position (462.3)	(.....) ✓
							▪ Correct operation verified (643.10)	(.....) ✓
							▪ Clearly identified by position and / or durable marking (537.2.7)	(.....) ✓
							▪ Warning label posted in situations where live parts cannot be isolated by the operation of a single device (514.11.1; 537.1.2)	N/A (.....)

ELECTRICAL INSTALLATION CONDITION REPORT

Issued in accordance with BS 7671: 2018+A2:2022 – Requirements for Electrical Installations

Original (to the person ordering the work)

PART 9 : SCHEDULE OF ITEMS INSPECTED (enter ✓, N/A or Classification Code C1, C2, C3 or FI, as applicable)

7.2 Switching off for mechanical maintenance –		8.5 Security of fixing (134.1.1)	(.....) ✓	▪ Low voltage (e.g. 230 volt) socket-outlets sited at least 2.5 m from zone 1 (701.512.3)	(.....) N/A
▪ Presence and condition of appropriate devices (464.1; 5373.2)	(.....) ✓	8.6 Cable entry holes in ceiling above luminaires, sized or sealed so as to restrict the spread of fire: list number and location of luminaires inspected (separate page) (527.2)	(.....) ✓	▪ Suitability of equipment for external influences for installed location in terms of IP rating (701.512.2)	(.....) ✓
▪ Capable of being secured in the OFF position where not under continuous supervision (464.2)	(.....) ✓	8.7 Recessed luminaires (downlighters) –		▪ Suitability of accessories and controlgear etc. for a particular zone (701.512.3)	(.....) ✓
▪ Correct operation verified (643.10)	(.....) ✓	▪ Correct type of lamps fitted (559.3.1)	(.....) ✓	▪ Suitability of current-using equipment for particular position within the location (701.55)	(.....) ✓
▪ Clearly identified by position and / or durable marking (5373.2.4)	(.....) ✓	▪ Installed to minimise build-up of heat by use of “fire rated” fittings, insulation displacement box or similar (421.1.2)	(.....) N/A	9.2 Other special installations or locations –	
7.3 Emergency switching off –		▪ No signs of overheating to surrounding building fabric (559.4.1)	(.....) N/A	N/A	(.....) N/A
▪ Presence and condition of appropriate devices (465; 5373.3; 5374)	(.....) N/A	▪ No signs of overheating to conductors / terminations (526.1)	(.....) N/A	(.....)
▪ Readily accessible for operation where danger might occur (5373.3.6)	(.....) N/A			(.....)
▪ Correct operation verified (643.10)	(.....) N/A	9.0 Special locations and installations		(.....)
▪ Clearly identified by position and / or durable marking (5373.3.5; 5373.3.6; 5374.3; 5374.4)	(.....) N/A	<i>Where special installations or locations relating to a particular Section of Part 7, an additional Inspection Schedule(s) should be provided on separate pages.</i>		(.....)
7.4 Functional switching –		9.1 Location(s) containing a bath or shower –		(.....)
▪ Presence and condition of appropriate devices (5373.1.1; 5373.1.2)	(.....) ✓	▪ Additional protection by RCD having rated residual operating current not exceeding 30 mA for all low voltage (LV) circuits serving the location or passing through zones 1 and / or 2 of the location (701.411.3.3)	(.....) ✓	10.0 Prosumer’s low voltage installation	(.....) N/A
▪ Correct operation verified (643.10)	(.....) ✓	▪ Where used as a protective measure, requirements for SELV or PELV met (701.414.4.5)	(.....) N/A	<i>Where elements of a prosuming installation falling within the scope of Chapter 82 are covered by the report, additional schedules detailing the associated inspection and testing should be provided on separate pages.</i>	
8.0 Current-using equipment (permanently connected)		▪ Shaver supply units complying with BS EN 61558-2-5 formerly BS 3535 (701.512.3)	(.....) ✓	Schedule of Items Inspected by	
8.1 Condition of equipment in terms of IP rating, etc. (416.2; 422.3; 422.4; 522.4)	(.....) ✓	▪ Presence of supplementary bonding conductors, unless not required by BS 7671: 2018 (701.415.2)	(.....) N/A	Name (capitals): LEE WELSHER	
8.2 Equipment does not constitute a fire hazard (421)	(.....) ✓			Signature: <i>L. Welsher</i>	Date: 16/05/2024
8.3 Enclosure not damaged / deteriorated so as to impair safety (134.1.1; 416.2)	(.....) ✓				
8.4 Suitability for the environment and external influences (512.2)	(.....) ✓				

PART 10 : SCHEDULES AND ADDITIONAL PAGES (the pages identified are an essential part of this report (see Regulation 653.2))

Schedule of Inspections	Schedule of Circuit Details and Test Results for the installation	Additional pages, including data sheets for additional sources	Special installations or locations (indicated in item 9.2 above)	Schedules relating to Prosumer’s installations (indicated in item 10 above)	Continuation sheets
Page No(s): (..... 4, 5 & 6))	Page No(s): (..... 7 & 8))	Page No(s): (None))	Page No(s): (..... 43))	Page No(s): (..... 44))	Page No(s): (..... 46-82))

ELECTRICAL INSTALLATION CONDITION REPORT

Issued in accordance with BS 7671: 2018+A2:2022 – Requirements for Electrical Installations

PART 11A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part 11B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART 11B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD			
					Live (mm ²)	cpc (mm ²)		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Zs* (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)
	Main Switch	N/A	N/A	N/A	N/A	N/A	N/A	60947-2		125	N/A	N/A	N/A	N/A	N/A	N/A
1L1	DB1 Ground Floor (This Room.)	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
1L2	DB1 Ground Floor (This Room.)	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
1L3	DB1 Ground Floor (This Room.)	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
2L1	DB2 1st Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
2L2	DB2 1st Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
2L3	DB2 1st Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
3L1	DB3 2nd Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
3L2	DB3 2nd Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
3L3	DB3 2nd Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
4L1	DB4 3rd Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
4L2	DB4 3rd Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
4L3	DB4 3rd Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
5L1	DB5 4th Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
5L2	DB5 4th Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
5L3	DB5 4th Floor	F	E	1	16	16	5	60947-2	MCCB	80	16	N/A	N/A	N/A	N/A	N/A
6L1	Mechanical Control Panel Plantroom	F	E	1	16	16	5	60947-2	MCCB	63	16	N/A	N/A	N/A	N/A	N/A
6L2	Mechanical Control Panel Plantroom	F	E	1	16	16	5	60947-2	MCCB	63	16	N/A	N/A	N/A	N/A	N/A

DISTRIBUTION BOARD (DB) DETAILS (complete in every case)

DB designation: MDB Oxwich, 12way TP+N, Main LV Switch Board

Location of DB: Oxwich building - Ground Floor Switchroom

Z_{db}: 0.09 (Ω) I_{pf} at DB†: 5.2 (kA)

Confirmation of supply polarity: (.....) Phase sequence confirmed†: (.....)

SPD Details** Types: T1 (N/A) T2 (N/A) T3 (N/A) N/A (.....)

Status indicator checked (where functionality indicator is present): (.....)

**SPD Type.

Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.

Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART 11B), (See Section 534 for further details).

Note that not all SPDs have visible functionality indication.

TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION

Supply to DB is from: N/A

Overcurrent protective device for the distribution circuit

BS (EN): (N/A) Type: (N/A) Nominal voltage: (N/A) V Rating: (N/A) A No. of phases: (N/A)

Associated RCD (if any)

BS (EN): (N/A) RCD Type: (N/A) I_{Δn}: (N/A) mA No. of poles: (N/A) Operating time: (N/A) ms

Original (to the person ordering the work)

ELECTRICAL INSTALLATION CONDITION REPORT

Issued in accordance with BS 7671: 2018+A2:2022 – Requirements for Electrical Installations

PART 11B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part 11A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**	Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live	Live / Earth	Test voltage DC			Operating time*	Test button	AFDD test button	
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂	(MΩ)	(MΩ)	(V)			(ms)	(✓)	(✓)	
	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
1L1	N/A	N/A	N/A	0.01	N/A	LIM	>2000	500	✓	0.10	N/A	N/A	N/A	N/A
1L2	N/A	N/A	N/A	0.01	N/A	LIM	>2000	500	✓	0.09	N/A	N/A	N/A	N/A
1L3	N/A	N/A	N/A	0.01	N/A	LIM	>2000	500	✓	0.10	N/A	N/A	N/A	N/A
2L1	N/A	N/A	N/A	0.05	N/A	LIM	>2000	500	✓	0.14	N/A	N/A	N/A	N/A
2L2	N/A	N/A	N/A	0.06	N/A	LIM	>2000	500	✓	0.15	N/A	N/A	N/A	N/A
2L3	N/A	N/A	N/A	0.04	N/A	LIM	>2000	500	✓	0.13	N/A	N/A	N/A	N/A
3L1	N/A	N/A	N/A	0.02	N/A	LIM	>2000	500	✓	0.11	N/A	N/A	N/A	N/A
3L2	N/A	N/A	N/A	0.02	N/A	LIM	>2000	500	✓	0.11	N/A	N/A	N/A	N/A
3L3	N/A	N/A	N/A	0.02	N/A	LIM	>2000	500	✓	0.11	N/A	N/A	N/A	N/A
4L1	N/A	N/A	N/A	0.01	N/A	LIM	>2000	500	✓	0.10	N/A	N/A	N/A	N/A
4L2	N/A	N/A	N/A	0.01	N/A	LIM	>2000	500	✓	0.10	N/A	N/A	N/A	N/A
4L3	N/A	N/A	N/A	0.01	N/A	LIM	>2000	500	✓	0.10	N/A	N/A	N/A	N/A
5L1	N/A	N/A	N/A	0.04	N/A	LIM	>2000	500	N/A	0.13	N/A	N/A	N/A	N/A
5L2	N/A	N/A	N/A	0.04	N/A	LIM	>2000	500	✓	0.13	N/A	N/A	N/A	N/A
5L3	N/A	N/A	N/A	0.03	N/A	LIM	>2000	500	✓	0.12	N/A	N/A	N/A	N/A
6L1	N/A	N/A	N/A	LIM	N/A	LIM	LIM	N/A	LIM	0.12	N/A	N/A	N/A	Unable to isolate panel for dead tests
6L2	N/A	N/A	N/A	LIM	N/A	LIM	LIM	N/A	LIM	0.12	N/A	N/A	N/A	Unable to isolate panel for dead tests

Circuits/equipment vulnerable to damage when testing (where applicable): Smoke Alarms, RCD's, Neons, Boiler Controls, All Current connected using equipment, Lamps

TESTED BY Name (capital): LEE WELSHER Position: Electrician Signature: [Signature] Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)

Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A
----------------------------	--------------------	-------------------------------	------------------------------------	------------------------------------	-------------

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): N/A
--------------------------	---	--	--	---	---	--------------------------------	--------------------------------	------------------------------	--------------------

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD			
					Live (mm ²)	cpc (mm ²)		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Z _s * (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)
					6L3	Mechanical Control Panel Plantroom		F	E	1	16	16	5	60947-2	MCCB	63
7L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
7L2	DB External Lighting (This Room.)	F	G	1	16	16	5	60947-2	MCCB	63	16	N/A	N/A	N/A	N/A	N/A
7L3	Fire alarm panel	A	C	1	2.5	2.5	0.4	60947-2	MCCB	16	16	N/A	N/A	N/A	N/A	N/A
8L1	Lift Supply	F	E	1	16	16	5	60947-2	MCCB	63	16	N/A	N/A	N/A	N/A	N/A
8L2	Lift Supply	F	E	1	16	16	5	60947-2	MCCB	63	16	N/A	N/A	N/A	N/A	N/A
8L3	Lift Supply	F	E	1	16	16	5	60947-2	MCCB	63	16	N/A	N/A	N/A	N/A	N/A
9L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
9L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
9L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

<p>DISTRIBUTION BOARD (DB) DETAILS (complete in every case)</p> <p>DB designation: <u>MDB Oxwich, 12way TP+N.</u> <u>Main LV Switch Board</u> Oxwich building - Ground Location of DB: <u>Floor, Switchroom</u></p> <p>Z_{db}: <u>0.09</u> (Ω) I_{pr} at DB: <u>5.2</u> (kA)</p> <p>Confirmation of supply polarity: (<input checked="" type="checkbox"/>) Phase sequence confirmed†: (<input checked="" type="checkbox"/>)</p> <p>SPD Details** Types: T1 (<u>N/A</u>) T2 (<u>N/A</u>) T3 (<u>N/A</u>) N/A (<input checked="" type="checkbox"/>)</p> <p>Status indicator checked (where functionality indicator is present): (<u>N/A</u>)</p>	<p>**SPD Type.</p> <p>Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.</p> <p>Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART B), (See Section 534 for further details).</p> <p>Note that not all SPDs have visible functionality indication.</p>	<p>TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION</p> <p>Supply to DB is from: <u>N/A</u></p> <p>Overcurrent protective device for the distribution circuit</p> <p>BS (EN): (<u>N/A</u>) Type: (<u>N/A</u>) Nominal voltage: (<u>N/A</u>) V Rating: (<u>N/A</u>) A No. of phases: (<u>N/A</u>)</p> <p>Associated RCD (if any)</p> <p>BS (EN): (<u>N/A</u>) RCD Type: (<u>N/A</u>) I_{Δn}: (<u>N/A</u>) mA No. of poles: (<u>N/A</u>) Operating time: (<u>N/A</u>) ms</p>
--	---	---

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**	Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live	Live / Earth	Test voltage DC			Operating time*	Test button	AFDD test button	
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂	(MΩ)	(MΩ)	(V)			(ms)	(✓)	(✓)	
6L3	N/A	N/A	N/A	LIM	N/A	LIM	LIM	N/A	LIM	0.12	N/A	N/A	N/A	Unable to isolate panel for dead tests
7L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
7L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	DB External Lighting no longer in use, switched off/disconn at time of Inspection.
7L3	N/A	N/A	N/A	0.17	N/A	LIM	>2000	500	✓	0.26	N/A	N/A	N/A	N/A
8L1	N/A	N/A	N/A	LIM	N/A	LIM	LIM	N/A	LIM	LIM	N/A	N/A	N/A	No access to lift supply isolator
8L2	N/A	N/A	N/A	LIM	N/A	LIM	LIM	N/A	LIM	LIM	N/A	N/A	N/A	No access to lift supply isolator
8L3	N/A	N/A	N/A	LIM	N/A	LIM	LIM	N/A	LIM	LIM	N/A	N/A	N/A	No access to lift supply isolator
9L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
9L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
9L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Circuits/equipment vulnerable to damage when testing (where applicable): Smoke Alarms, RCD's, Neons, Boiler Controls, All Current connected using equipment, Lamps

TESTED BY Name (capitals): LEE WELSHER Position: Electrician Signature: [Signature] Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)					
Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): N/A
---------------------------------	--	---	---	--	--	---------------------------------------	---------------------------------------	-------------------------------------	--------------------

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD			
					Live	cpc		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Zs* (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)
					(mm ²)	(mm ²)										
	Main Switch	N/A	N/A	N/A	N/A	N/A	N/A	60947-2		125	N/A	N/A	N/A	N/A	N/A	N/A
1L1	Bedroom Lighting - rooms 001-004	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
1L2	Bedroom Lighting - rooms 009-012	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
1L3	Corridor lighting K1	A	E	12	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
2L1	Bedroom Lighting - rooms 005-008	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
2L2	Bedroom Lighting - rooms 013-016	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
2L3	Corridor lighting K2	A	E	10	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
3L1	Kitchen K1 + Switchroom Lighting	A	E	5	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
3L2	Kitchen Lighting K2	A	E	3	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
3L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
4L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
4L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
4L3	Lobby Lighting	A	E	10	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
5L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L3	Stairwell Lighting - GF to FF	A	E	6	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
6L1	Bedroom Ring Main - rooms 9-12	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
6L2	Bedroom Ring Main - rooms 5-8	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30

<p>DISTRIBUTION BOARD (DB) DETAILS (complete in every case)</p> <p>DB designation: DB1 Oxwich-Ground Floor. <small>Lighting and Small Power</small></p> <p>Location of DB: Oxwich building - Ground Floor, Switchroom</p> <p>Z_{db}: 0.1 (Ω) I_{pf} at DB: 4.76 (kA)</p> <p>Confirmation of supply polarity: (✓) Phase sequence confirmed†: (✓)</p> <p>SPD Details** Types: T1 (N/A) T2 (N/A) T3 (N/A) N/A (✓)</p> <p>Status indicator checked (where functionality indicator is present): (N/A)</p>	<p>**SPD Type.</p> <p>Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.</p> <p>Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART B), (See Section 534 for further details).</p> <p>Note that not all SPDs have visible functionality indication.</p>	<p>TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION</p> <p>Supply to DB is from: MDB Oxwich. 12way TP+N. Main LV Switch Board - 1L1</p> <p>Overcurrent protective device for the distribution circuit</p> <p>BS (EN): (60947-2) Type: (MCCB) Nominal voltage: (400) V Rating: (80) A No. of phases: (3)</p> <p>Associated RCD (if any)</p> <p>BS (EN): (N/A) RCD Type: (N/A) I_{Δn}: (N/A) mA No. of poles: (N/A) Operating time: (N/A) ms</p>
--	---	---

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**		Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live	Live / Earth	Test voltage DC			Operating time*	Test button	AFDD test button		
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂	(MΩ)	(MΩ)	(V)			(ms)	(✓)	(✓)		
	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
1L1	N/A	N/A	N/A	0.56	N/A	LIM	>999	500	✓	0.66	28.7	✓	N/A	N/A	
1L2	N/A	N/A	N/A	1.57	N/A	LIM	>999	500	✓	1.67	28.9	✓	N/A	N/A	
1L3	N/A	N/A	N/A	2.02	N/A	LIM	>999	500	✓	2.12	28.7	✓	N/A	N/A	
2L1	N/A	N/A	N/A	0.56	N/A	LIM	>999	500	✓	0.66	28.9	✓	N/A	N/A	
2L2	N/A	N/A	N/A	1.48	N/A	LIM	>999	500	✓	1.58	28.9	✓	N/A	N/A	
2L3	N/A	N/A	N/A	1.20	N/A	LIM	>999	500	✓	1.30	N/A	N/A	N/A	N/A	
3L1	N/A	N/A	N/A	0.94	N/A	LIM	42.1	500	✓	1.04	N/A	N/A	N/A	N/A	
3L2	N/A	N/A	N/A	0.50	N/A	LIM	>999	500	✓	0.60	N/A	N/A	N/A	N/A	
3L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
4L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
4L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
4L3	N/A	N/A	N/A	1.05	N/A	LIM	958	N/A	✓	1.15	N/A	N/A	N/A	N/A	
5L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L3	N/A	N/A	N/A	1.23	N/A	LIM	>999	500	✓	1.33	N/A	N/A	N/A	N/A	
6L1	0.35	0.33	0.98	0.33	N/A	LIM	18.1	500	✓	0.47	29.6	✓	N/A	N/A	
6L2	0.43	0.40	1.13	0.41	N/A	LIM	20.2	500	✓	0.57	34	✓	N/A	N/A	

Circuits/equipment vulnerable to damage when testing (where applicable): Lamps, Neons, RCDs, Electronic Equipment.

TESTED BY Name (capitals): LEE WELSHER Position: Electrician Signature: [Signature] Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)					
Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): N/A
---------------------------------	--	---	---	--	--	---------------------------------------	---------------------------------------	-------------------------------------	--------------------

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD			
					Live (mm ²)	cpc (mm ²)		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Zs* (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)
					6L3	General Ring Main - Cor,Srm,Lob,Strs		A	C	8	4	1.5	0.4	61009	C	32
7L1	Bedroom Ring Main - rooms 13-16	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
7L2	Bedroom Ring Main - rooms 1-4	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
7L3	Lobby Fcu Radial	A	C	1	4	1.5	0.4	60898	C	20	10	0.87	N/A	N/A	N/A	N/A
8L1	Cooker Supply K1	A	C	2	10	4	0.4	61009	C	32	10	0.54	61009	A	32	30
8L2	Cooker Supply K2	A	C	2	10	4	0.4	61009	C	32	10	0.54	61009	A	32	30
8L3	Door Entry,Camera's,Smoke Vents,Refuge	A	C	4	4	1.5	0.4	60898	C	20	10	0.87	N/A	N/A	N/A	N/A
9L1	Kitchen Ring Main K1	A	C	7	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
9L2	Kitchen Ring Main K2	A	C	7	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
9L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10L1	Hob Supply K1	A	C	1	4	1.5	0.4	60898	C	25	10	0.70	N/A	N/A	N/A	N/A
10L2	Hob Supply K2	A	C	1	4	1.5	0.4	60898	C	25	10	0.70	N/A	N/A	N/A	N/A
10L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

<p>DISTRIBUTION BOARD (DB) DETAILS (complete in every case)</p> <p>DB designation: DB1 Oxwich-Ground Floor, Lighting and Small Power, Oxwich building - Ground</p> <p>Location of DB: Floor, Switchroom</p> <p>Z_{db}: 0.1 (Ω) I_{pf} at DB: 4.76 (kA)</p> <p>Confirmation of supply polarity: (✓) Phase sequence confirmed†: (✓)</p> <p>SPD Details** Types: T1 (N/A) T2 (N/A) T3 (N/A) N/A (✓)</p> <p>Status indicator checked (where functionality indicator is present): (N/A)</p>	<p>**SPD Type.</p> <p>Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.</p> <p>Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART B), (See Section 534 for further details).</p> <p>Note that not all SPDs have visible functionality indication.</p>	<p>TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION</p> <p>Supply to DB is from: MDB Oxwich, 12way TP+N, Main LV Switch Board - 1L1</p> <p>Overcurrent protective device for the distribution circuit</p> <p>BS (EN): (60947-2) Type: (MCCB) Nominal voltage: (400) V Rating: (80) A No. of phases: (3)</p> <p>Associated RCD (if any)</p> <p>BS (EN): (N/A) RCD Type: (N/A) I_{Δn}: (N/A) mA No. of poles: (N/A) Operating time: (N/A) ms</p>
---	---	---

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**		Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live	Live / Earth	Test voltage DC			Operating time*	Test button	AFDD test button		
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂	(MΩ)	(MΩ)	(V)			(ms)	(✓)	(✓)		
6L3	0.46	0.46	1.26	0.47	N/A	LIM	30.5	500	✓	0.59	38.6	✓	N/A	N/A	
7L1	0.32	0.32	0.85	0.29	N/A	LIM	>999	500	✓	0.43	38.8	✓	N/A	N/A	
7L2	0.48	0.48	1.30	0.48	N/A	LIM	>999	500	✓	0.58	40	✓	N/A	N/A	
7L3	N/A	N/A	N/A	0.19	N/A	LIM	>999	500	✓	0.29	N/A	N/A	N/A	N/A	
8L1	N/A	N/A	N/A	0.46	N/A	LIM	496	500	✓	0.56	28.8	✓	N/A	N/A	
8L2	N/A	N/A	N/A	0.48	N/A	LIM	>999	500	✓	0.58	28.8	✓	N/A	N/A	
8L3	N/A	N/A	N/A	0.27	N/A	LIM	>999	500	✓	0.37	N/A	N/A	N/A	N/A	
9L1	0.29	0.29	0.79	0.25	N/A	LIM	135	500	✓	0.45	29.1	✓	N/A	N/A	
9L2	0.14	0.13	0.40	0.12	N/A	LIM	130	500	✓	0.26	31.2	✓	N/A	N/A	
9L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
10L1	N/A	N/A	N/A	0.36	N/A	LIM	>999	500	✓	0.46	N/A	N/A	N/A	N/A	
10L2	N/A	N/A	N/A	0.29	N/A	LIM	>999	500	✓	0.39	N/A	N/A	N/A	N/A	
10L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
11L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
11L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
11L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
12L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
12L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

Circuits/equipment vulnerable to damage when testing (where applicable): Lamps, Neons, RCDs, Electronic Equipment.

TESTED BY Name (capitals): LEE WELSHER Position: Electrician Signature: Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)					
Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): <u>N/A</u>
---------------------------------	--	---	---	--	--	---------------------------------------	---------------------------------------	-------------------------------------	---------------------------

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD			
					Live (mm ²)	cpc (mm ²)		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Zs* (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)
						Main Switch		N/A	N/A	N/A	N/A	N/A	N/A	60947-2		125
1L1	Corridor lighting K1 + External Ltg	A	E	14	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
1L2	Bedroom Lighting - rooms 1-4	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
1L3	Bedroom Lighting - rooms 9-12	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
2L1	Corridor lighting K2	A	E	11	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
2L2	Bedroom Lighting - rooms 5-8	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
2L3	Bedroom Lighting - rooms 13-16	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
3L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
3L2	Kitchen Lighting K1	A	E	3	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
3L3	Kitchen Lighting K2	A	E	3	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
4L1	Lobby Lighting	A	E	12	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
4L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
4L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
6L1	General Ring Main - Cor,Lob,Strs	A	C	6	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
6L2	Bedroom Ring Main - rooms 9-12	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30

DISTRIBUTION BOARD (DB) DETAILS (complete in every case)

DB designation: DB2 Oxwich-First Floor.
 Oxwich building - First
 Location of DB: Floor, DB riser.....

Z_{db}: 0.15 (Ω) I_{pf} at DB†: 3.06 (kA)

Confirmation of supply polarity: (✓) Phase sequence confirmed†: (✓)

SPD Details** Types: T1 (N/A) T2 (N/A) T3 (N/A) N/A (✓)

Status indicator checked (where functionality indicator is present): (N/A)

**SPD Type.
 Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.
 Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART B), (See Section 534 for further details).
 Note that not all SPDs have visible functionality indication.

TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION

Supply to DB is from: MDB Oxwich. 12way TP+N. Main LV Switch Board - 2L1

Overcurrent protective device for the distribution circuit
 BS (EN): (60947-2) Type: (MCCB) Nominal voltage: (400) V Rating: (80) A No. of phases: (3)

Associated RCD (if any)
 BS (EN): (N/A) RCD Type: (N/A) I_{Δn}: (N/A) mA No. of poles: (N/A) Operating time: (N/A) ms

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**	Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live (MΩ)	Live / Earth (MΩ)	Test voltage DC (V)			Operating time* (ms)	Test button (✓)	AFDD test button (✓)	
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂									
	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
1L1	N/A	N/A	N/A	1.95	N/A	LIM	1531	500	✓	2.09	28.7	✓	N/A	N/A
1L2	N/A	N/A	N/A	1.84	N/A	LIM	527	500	✓	1.99	29.8	✓	N/A	N/A
1L3	N/A	N/A	N/A	1.48	N/A	LIM	>2000	500	✓	1.61	28.8	✓	N/A	N/A
2L1	N/A	N/A	N/A	1.28	N/A	LIM	>2000	500	✓	1.42	N/A	N/A	N/A	N/A
2L2	N/A	N/A	N/A	1.72	N/A	LIM	1966	500	✓	1.87	28.2	✓	N/A	N/A
2L3	N/A	N/A	N/A	1.54	N/A	LIM	>2000	500	✓	1.67	28.6	✓	N/A	N/A
3L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
3L2	N/A	N/A	N/A	0.87	N/A	LIM	>2000	500	✓	1.02	N/A	N/A	N/A	N/A
3L3	N/A	N/A	N/A	0.46	N/A	LIM	>2000	500	✓	0.59	N/A	N/A	N/A	N/A
4L1	N/A	N/A	N/A	0.75	N/A	LIM	>2000	500	✓	0.89	N/A	N/A	N/A	N/A
4L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
4L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
6L1	0.60	0.60	1.6	0.50	N/A	LIM	111	500	✓	0.62	38.8	✓	N/A	N/A
6L2	0.27	0.26	0.71	0.26	N/A	LIM	40.2	500	✓	0.43	30	✓	N/A	N/A

Circuits/equipment vulnerable to damage when testing (where applicable): Lamps, Neons, RCDs, Electronic Equipment.

TESTED BY Name (capitals): LEE WELSHER Position: Electrician Signature: [Signature] Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)					
Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): N/A
---------------------------------	--	---	---	--	--	---------------------------------------	---------------------------------------	-------------------------------------	--------------------

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD			
					Live (mm ²)	cpc (mm ²)		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Zs* (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)
					6L3	Bedroom Ring Main - rooms 5-8		A	C	12	4	1.5	0.4	61009	C	32
7L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
7L2	Bedroom Ring Main - rooms 13-16	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
7L3	Bedroom Ring Main - rooms 1-4	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
8L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
8L2	Cooker Supply K1	A	C	2	10	4	0.4	61009	C	32	10	0.54	61009	A	10	30
8L3	Cooker Supply K2	A	C	2	10	4	0.4	61009	C	32	10	0.54	61009	A	32	30
9L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
9L2	Kitchen Ring Main K1	A	C	7	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
9L3	Kitchen Ring Main K2	A	C	7	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
10L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10L2	Hob Supply K1	A	C	1	4	1.5	0.4	60898	C	25	10	0.70	N/A	N/A	N/A	N/A
10L3	Hob Supply K2	A	C	1	4	1.5	0.4	60898	C	25	10	0.70	N/A	N/A	N/A	N/A
11L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

DISTRIBUTION BOARD (DB) DETAILS (complete in every case)

DB2 Oxwich-First Floor.
 DB designation: Lighting and Small Power.
 Oxwich building - First
 Location of DB: Floor, DB riser.

Z_{db}: 0.15 (Ω) I_{pf} at DB†: 3.06 (kA)

Confirmation of supply polarity: (✓) Phase sequence confirmed†: (✓)

SPD Details** Types: T1 (N/A) T2 (N/A) T3 (N/A) N/A (✓)

Status indicator checked (where functionality indicator is present): (N/A)

**SPD Type.
 Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.
 Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART B), (See Section 534 for further details).
 Note that not all SPDs have visible functionality indication.

TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION

Supply to DB is from: MDB Oxwich. 12way TP+N. Main LV Switch Board - 2L1

Overcurrent protective device for the distribution circuit
 BS (EN): (60947-2) Type: (MCCB) Nominal voltage: (400) V Rating: (80) A No. of phases: (3)

Associated RCD (if any)
 BS (EN): (N/A) RCD Type: (N/A) I_{Δn}: (N/A) mA No. of poles: (N/A) Operating time: (N/A) ms

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**		Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live	Live / Earth	Test voltage DC			Operating time*	Test button	AFDD test button		
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂	(MΩ)	(MΩ)	(V)			(ms)	(✓)	(✓)		
6L3	0.39	0.39	1.03	0.35	N/A	LIM	31.9	500	✓	0.50	30.4	✓	N/A	N/A	
7L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
7L2	0.30	0.30	0.80	0.28	N/A	LIM	1578	500	✓	0.43	29.2	✓	N/A	N/A	
7L3	0.43	0.44	1.18	0.39	N/A	LIM	838	500	✓	0.54	29.8	✓	N/A	N/A	
8L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
8L2	N/A	N/A	N/A	0.13	N/A	LIM	>2000	500	✓	0.28	29.2	✓	N/A	N/A	
8L3	N/A	N/A	N/A	0.07	N/A	LIM	>2000	500	✓	0.20	29.2	✓	N/A	N/A	
9L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
9L2	0.38	0.40	0.99	0.36	N/A	LIM	204	500	✓	0.51	28.8	✓	N/A	N/A	
9L3	0.21	0.20	0.53	0.16	N/A	LIM	251	500	✓	0.29	30	✓	N/A	N/A	
10L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
10L2	N/A	N/A	N/A	0.44	N/A	LIM	>2000	500	✓	0.59	N/A	N/A	N/A	N/A	
10L3	N/A	N/A	N/A	0.19	N/A	LIM	>2000	500	✓	0.32	N/A	N/A	N/A	N/A	
11L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
11L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
11L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
12L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
12L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

Circuits/equipment vulnerable to damage when testing (where applicable): Lamps, Neons, RCDs, Electronic Equipment.

TESTED BY Name (capitals): LEE WELSHER Position: Electrician Signature: [Signature] Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)					
Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): N/A
---------------------------------	--	---	---	--	--	---------------------------------------	---------------------------------------	-------------------------------------	--------------------

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD				
					Live (mm ²)	cpc (mm ²)		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Zs* (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)	
	Main Switch	N/A	N/A	N/A	N/A	N/A	N/A	60947-2		125	N/A	N/A	N/A	N/A	N/A	N/A	N/A
1L1	Bedroom Lighting - rooms 9-12	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30	
1L2	Corridor lighting K1	A	E	12	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30	
1L3	Bedroom Lighting - rooms 1-4	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30	
2L1	Bedroom Lighting - rooms 13-16	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30	
2L2	Corridor lighting K2	A	E	11	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A	
2L3	Bedroom Lighting - rooms 5-8	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30	
3L1	Kitchen Lighting K2	A	E	3	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A	
3L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
3L3	Kitchen Lighting K1	A	E	3	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A	
4L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
4L2	Lobby Lighting	A	E	12	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A	
4L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
6L1	Bedroom Ring Main - rooms 5-8	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30	
6L2	General Ring Main - Cor,Lob,Strs	A	C	6	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30	

<p>DISTRIBUTION BOARD (DB) DETAILS (complete in every case)</p> <p>DB3 Oxwich-Second Floor. DB designation: Lighting and Small Power. Oxwich building - Second Location of DB: Floor, DB riser.</p> <p>Z_{db}: 0.11 (Ω) I_{pr} at DB†: 4.1 (kA)</p> <p>Confirmation of supply polarity: (✓) Phase sequence confirmed†: (✓)</p> <p>SPD Details** Types: T1 (N/A) T2 (N/A) T3 (N/A) N/A (✓)</p> <p>Status indicator checked (where functionality indicator is present): (N/A)</p>	<p>**SPD Type.</p> <p>Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.</p> <p>Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART B), (See Section 534 for further details).</p> <p>Note that not all SPDs have visible functionality indication.</p>	<p>TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION</p> <p>Supply to DB is from: MDB Oxwich. 12way TP+N. Main LV Switch Board - 3L1</p> <p>Overcurrent protective device for the distribution circuit</p> <p>BS (EN): (60947-2) Type: (MCCB) Nominal voltage: (400) V Rating: (80) A No. of phases: (3)</p> <p>Associated RCD (if any)</p> <p>BS (EN): (N/A) RCD Type: (N/A) I_{Δn}: (N/A) mA No. of poles: (N/A) Operating time: (N/A) ms</p>
---	---	---

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**		Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live	Live / Earth	Test voltage DC			Operating time*	Test button	AFDD test button		
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂	(MΩ)	(MΩ)	(V)			(ms)	(✓)	(✓)		
	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
1L1	N/A	N/A	N/A	1.30	N/A	LIM	>999	500	✓	1.41	28.8	✓	N/A	N/A	
1L2	N/A	N/A	N/A	1.51	N/A	LIM	>999	500	✓	1.71	28.9	✓	N/A	N/A	
1L3	N/A	N/A	N/A	1.47	N/A	LIM	>999	500	✓	1.58	28.9	✓	N/A	N/A	
2L1	N/A	N/A	N/A	1.10	N/A	LIM	>999	500	✓	1.21	28.7	✓	N/A	N/A	
2L2	N/A	N/A	N/A	1.37	N/A	LIM	>999	500	✓	1.48	N/A	N/A	N/A	N/A	
2L3	N/A	N/A	N/A	1.44	N/A	LIM	>999	500	✓	1.55	28.8	✓	N/A	N/A	
3L1	N/A	N/A	N/A	0.49	N/A	LIM	455	500	✓	0.60	N/A	N/A	N/A	N/A	
3L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
3L3	N/A	N/A	N/A	0.61	N/A	LIM	791	500	✓	0.72	N/A	N/A	N/A	N/A	
4L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
4L2	N/A	N/A	N/A	0.74	N/A	LIM	397	500	✓	0.85	N/A	N/A	N/A	N/A	
4L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
6L1	0.47	0.48	1.22	0.39	N/A	LIM	4.67	500	✓	0.50	38.4	✓	N/A	N/A	
6L2	0.60	0.60	1.58	0.54	N/A	LIM	743	500	✓	0.62	39.2	✓	N/A	N/A	

Circuits/equipment vulnerable to damage when testing (where applicable): Lamps, Neons, RCDs, Electronic Equipment.

TESTED BY Name (capitals): LEE WELSHER Position: Electrician Signature: *[Signature]* Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)

Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A
----------------------------	--------------------	-------------------------------	------------------------------------	------------------------------------	-------------

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): N/A
---------------------------------	---	--	--	---	---	--------------------------------	--------------------------------	------------------------------	--------------------

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD			
					Live (mm ²)	cpc (mm ²)		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Zs* (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)
					6L3	Bedroom Ring Main - rooms 13-16		A	C	12	4	1.5	0.4	61009	C	32
7L1	Bedroom Ring Main - rooms 1-4	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
7L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
7L3	Bedroom Ring Main - rooms 9-12	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
8L1	Cooker Supply K2	A	C	2	10	4	0.4	61009	C	32	10	0.54	61009	A	32	30
8L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
8L3	Cooker Supply K1	A	C	2	10	4	0.4	61009	C	32	10	0.54	61009	A	32	30
9L1	Kitchen Ring Main K2	A	C	7	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
9L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
9L3	Kitchen Ring Main K1	A	C	7	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
10L1	Hob Supply K2	A	C	1	4	1.5	0.4	60898	C	25	10	0.70	N/A	N/A	N/A	N/A
10L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10L3	Hob Supply K1	A	C	1	4	1.5	0.4	60898	C	25	10	0.70	N/A	N/A	N/A	N/A
11L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

<p>DISTRIBUTION BOARD (DB) DETAILS (complete in every case)</p> <p>DB designation: DB3 Oxwich-Second Floor. Lighting and Small Power. Oxwich building - Second</p> <p>Location of DB: Floor, DB riser.</p> <p>Z_{db}: 0.11 (Ω) I_{pr} at DB†: 4.1 (kA)</p> <p>Confirmation of supply polarity: (✓) Phase sequence confirmed†: (✓)</p> <p>SPD Details** Types: T1 (N/A) T2 (N/A) T3 (N/A) N/A (✓)</p> <p>Status indicator checked (where functionality indicator is present): (N/A)</p>	<p>**SPD Type.</p> <p>Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.</p> <p>Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART B), (See Section 534 for further details).</p> <p>Note that not all SPDs have visible functionality indication.</p>	<p>TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION</p> <p>Supply to DB is from: MDB Oxwich. 12way TP+N. Main LV Switch Board - 3L1</p> <p>Overcurrent protective device for the distribution circuit</p> <p>BS (EN): (60947-2) Type: (MCCB) Nominal voltage: (400) V Rating: (80) A No. of phases: (3)</p> <p>Associated RCD (if any)</p> <p>BS (EN): (N/A) RCD Type: (N/A) I_{Δn}: (N/A) mA No. of poles: (N/A) Operating time: (N/A) ms</p>
---	---	---

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**		Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live	Live / Earth	Test voltage DC			Operating time*	Test button	AFDD test button		
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂	(MΩ)	(MΩ)	(V)			(ms)	(✓)	(✓)		
6L3	0.59	0.59	1.53	0.50	N/A	LIM	>999	500	✓	0.61	38.6	✓	N/A	N/A	
7L1	0.52	0.52	1.39	0.48	N/A	LIM	30.0	500	✓	0.59	38.5	✓	N/A	N/A	
7L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
7L3	0.34	0.34	0.87	0.27	N/A	LIM	391	500	✓	0.37	28.6	✓	N/A	N/A	
8L1	N/A	N/A	N/A	0.05	N/A	LIM	321	500	✓	0.16	29.2	✓	N/A	N/A	
8L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
8L3	N/A	N/A	N/A	0.14	N/A	LIM	>999	500	✓	0.25	28.6	✓	N/A	N/A	
9L1	0.20	0.21	0.57	0.18	N/A	LIM	266	500	✓	0.30	31.2	✓	N/A	N/A	
9L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
9L3	0.38	0.38	0.98	0.36	N/A	LIM	94.1	500	✓	0.49	28.8	✓	N/A	N/A	
10L1	N/A	N/A	N/A	0.11	N/A	LIM	>999	500	✓	0.22	N/A	N/A	N/A	N/A	
10L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
10L3	N/A	N/A	N/A	0.51	N/A	LIM	614	500	✓	0.62	N/A	N/A	N/A	N/A	
11L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
11L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
11L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
12L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
12L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

Circuits/equipment vulnerable to damage when testing (where applicable): Lamps, Neons, RCDs, Electronic Equipment.

TESTED BY Name (capitals): LEE WELSHER Position: Electrician Signature: [Signature] Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)					
Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): N/A
--------------------------	---	--	--	---	---	--------------------------------	--------------------------------	------------------------------	--------------------

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD			
					Live (mm ²)	cpc (mm ²)		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Zs* (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)
	Main Switch	N/A	N/A	N/A	N/A	N/A	N/A	60947-2		125	N/A	N/A	N/A	N/A	N/A	N/A
1L1	Bedroom Lighting - rooms 1-4	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
1L2	Bedroom Lighting - rooms 9-12	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
1L3	Corridor lighting K1	A	E	12	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
2L1	Bedroom Lighting - rooms 5-8	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
2L2	Bedroom Lighting - rooms 13-16	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30
2L3	Corridor lighting K2	A	E	11	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
3L1	Kitchen Lighting K1	A	E	3	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
3L2	Kitchen Lighting K2	A	E	3	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
3L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
4L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
4L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
4L3	Lobby Lighting	A	E	12	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
5L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L3	Stairwell Lighting - 2nd to 4th Floor	A	E	12	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A
6L1	Bedroom Ring Main - rooms 9-12	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
6L2	Bedroom Ring Main - rooms 5-8	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30

DISTRIBUTION BOARD (DB) DETAILS (complete in every case)

DB4 Oxwich-Third Floor.
 DB designation: Lighting and Small Power
 Oxwich building - Third
 Location of DB: Floor, DB, Riser

Z_{db}: 0.1 (Ω) I_{pr} at DB: 4.6 (kA)

Confirmation of supply polarity: (✓) Phase sequence confirmed†: (✓)

SPD Details** Types: T1 (N/A) T2 (N/A) T3 (N/A) N/A (✓)

Status indicator checked (where functionality indicator is present): (N/A)

**SPD Type.
 Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.
 Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART B), (See Section 534 for further details).
 Note that not all SPDs have visible functionality indication.

TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION

Supply to DB is from: MDB Oxwich. 12way TP+N. Main LV Switch Board - 4L1

Overcurrent protective device for the distribution circuit
 BS (EN): (60947-2) Type: (MCCB) Nominal voltage: (400) V Rating: (80) A No. of phases: (3)

Associated RCD (if any)
 BS (EN): (N/A) RCD Type: (N/A) I_{Δn}: (N/A) mA No. of poles: (N/A) Operating time: (N/A) ms

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**		Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live	Live / Earth	Test voltage DC			Operating time*	Test button	AFDD test button		
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂	(MΩ)	(MΩ)	(V)			(ms)	(✓)	(✓)		
	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
1L1	N/A	N/A	N/A	1.42	N/A	LIM	955	500	✓	1.56	28.7	✓	N/A	N/A	
1L2	N/A	N/A	N/A	1.14	N/A	LIM	468	500	✓	1.22	28.7	✓	N/A	N/A	
1L3	N/A	N/A	N/A	1.63	N/A	LIM	>999	500	✓	1.73	N/A	N/A	N/A	N/A	
2L1	N/A	N/A	N/A	1.33	N/A	LIM	713	500	✓	1.41	28.8	✓	N/A	N/A	
2L2	N/A	N/A	N/A	1.24	N/A	LIM	>999	500	✓	1.32	28.8	✓	N/A	N/A	
2L3	N/A	N/A	N/A	1.36	N/A	LIM	>999	500	✓	1.46	N/A	N/A	N/A	N/A	
3L1	N/A	N/A	N/A	1.00	N/A	LIM	456	500	✓	1.08	N/A	N/A	N/A	N/A	
3L2	N/A	N/A	N/A	0.51	N/A	LIM	635	500	✓	0.59	N/A	N/A	N/A	N/A	
3L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
4L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
4L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
4L3	N/A	N/A	N/A	1.46	N/A	LIM	386	500	✓	1.56	N/A	N/A	N/A	N/A	
5L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L3	N/A	N/A	N/A	0.85	N/A	LIM	5.55	500	✓	0.95	N/A	N/A	N/A	N/A	
6L1	0.34	0.34	0.86	0.27	N/A	LIM	190	500	✓	0.35	39.6	✓	N/A	N/A	
6L2	0.46	0.46	1.20	0.39	N/A	LIM	13.8	500	✓	0.47	39.6	✓	N/A	N/A	

Circuits/equipment vulnerable to damage when testing (where applicable): N/A

TESTED BY Name (capitals): LEE WELSHER Position: Electrician Signature: [Signature] Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)					
Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): N/A
---------------------------------	--	---	---	--	--	---------------------------------------	---------------------------------------	-------------------------------------	--------------------

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD			
					Live (mm ²)	cpc (mm ²)		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Zs* (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)
					6L3	General Ring Main - Cor,Lob,Strs		A	C	6	4	1.5	0.4	61009	C	32
7L1	Bedroom Ring Main - rooms 13-16	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
7L2	Bedroom Ring Main - rooms 1-4	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
7L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
8L1	Cooker Supply K1	A	C	2	10	4	0.4	61009	C	32	10	0.54	61009	A	32	30
8L2	Cooker Supply K2	A	C	2	10	4	0.4	61009	C	32	10	0.54	61009	A	32	30
8L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
9L1	Kitchen Ring Main K1	A	C	7	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
9L2	Kitchen Ring Main K2	A	C	7	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
9L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
10L1	Hob Supply K1	A	C	1	4	1.5	0.4	60898	C	25	10	0.70	N/A	N/A	N/A	N/A
10L2	Hob Supply K2	A	C	1	4	1.5	0.4	60898	C	25	10	0.70	N/A	N/A	N/A	N/A
10L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

<p>DISTRIBUTION BOARD (DB) DETAILS (complete in every case)</p> <p>DB designation: DB4 Oxwich-Third Floor, Lighting and Small Power</p> <p>Location of DB: Floor, DB, Riser: Oxwich building - Third Floor, DB, Riser</p> <p>Z_{db}: 0.1 (Ω) I_{pf} at DB: 4.6 (kA)</p> <p>Confirmation of supply polarity: (✓) Phase sequence confirmed†: (✓)</p> <p>SPD Details** Types: T1 (N/A) T2 (N/A) T3 (N/A) N/A (✓)</p> <p>Status indicator checked (where functionality indicator is present): (N/A)</p>	<p>**SPD Type.</p> <p>Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.</p> <p>Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART B), (See Section 534 for further details).</p> <p>Note that not all SPDs have visible functionality indication.</p>	<p>TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION</p> <p>Supply to DB is from: MDB Oxwich, 12way TP+N, Main LV Switch Board - 4L1</p> <p>Overcurrent protective device for the distribution circuit</p> <p>BS (EN): (60947-2) Type: (MCCB) Nominal voltage: (400) V Rating: (80) A No. of phases: (3)</p> <p>Associated RCD (if any)</p> <p>BS (EN): (N/A) RCD Type: (N/A) I_{Δn}: (N/A) mA No. of poles: (N/A) Operating time: (N/A) ms</p>
--	---	---

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**		Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live (MΩ)	Live / Earth (MΩ)	Test voltage DC (V)			Operating time* (ms)	Test button (✓)	AFDD test button (✓)		
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂										
6L3	0.55	0.57	1.44	0.45	N/A	LIM	969	500	✓	0.55	28.8	✓	N/A	N/A	
7L1	0.28	0.30	0.73	0.25	N/A	LIM	1857	500	✓	0.43	28.8	✓	N/A	N/A	
7L2	0.44	0.43	1.17	0.40	N/A	LIM	552	500	✓	0.54	39.2	✓	N/A	N/A	
7L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
8L1	N/A	N/A	N/A	0.15	N/A	LIM	38.2	500	✓	0.23	29.2	✓	N/A	N/A	
8L2	N/A	N/A	N/A	0.05	N/A	LIM	>2000	500	✓	0.13	29.2	✓	N/A	N/A	
8L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
9L1	0.30	0.28	0.80	0.27	N/A	LIM	49.1	500	✓	0.38	124	✓	N/A	N/A	
9L2	0.17	0.17	0.48	0.16	N/A	LIM	520	500	✓	0.28	29.2	✓	N/A	N/A	
9L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
10L1	N/A	N/A	N/A	0.34	N/A	LIM	>2000	500	✓	0.42	N/A	N/A	N/A	N/A	
10L2	N/A	N/A	N/A	0.22	N/A	LIM	>2000	500	✓	0.29	N/A	N/A	N/A	N/A	
10L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
11L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
11L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
11L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
12L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
12L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

Circuits/equipment vulnerable to damage when testing (where applicable): N/A

TESTED BY Name (capitals): LEE WELSHER Position: Electrician Signature: Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)					
Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): N/A
---------------------------------	--	---	---	--	--	---------------------------------------	---------------------------------------	-------------------------------------	--------------------

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD				
					Live (mm ²)	cpc (mm ²)		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Zs* (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)	
	Main Switch	N/A	N/A	N/A	N/A	N/A	N/A	60947-2		125	N/A	N/A	N/A	N/A	N/A	N/A	N/A
1L1	Corridor lighting K1	A	E	12	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30	
1L2	Bedroom Lighting - rooms 1-4	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30	
1L3	Bedroom Lighting - rooms 9-12	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30	
2L1	Corridor lighting K2	A	E	11	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A	
2L2	Bedroom Lighting - rooms 5-8	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30	
2L3	Bedroom Lighting - rooms 13-16	A	E	24	1.5	1	0.4	61009	C	10	10	1.75	61009	A	10	30	
3L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
3L2	Kitchen Lighting K1	A	E	3	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A	
3L3	Kitchen Lighting K2	A	E	3	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A	
4L1	Lobby Lighting	A	E	12	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A	
4L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
4L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L1	Plantroom Lighting - top floor	A	E	6	1.5	1	0.4	60898	C	10	10	1.75	N/A	N/A	N/A	N/A	
5L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
5L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
6L1	General Ring Main - Cor,Lob,Strs	A	C	6	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30	
6L2	Bedroom Ring Main - rooms 9-12	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30	

DISTRIBUTION BOARD (DB) DETAILS (complete in every case)

DB designation: DB5 Oxwich-Fourth Floor.
Lighting and Small Power. Oxwich building - Fourth

Location of DB: Floor, DB riser.

Z_{db}: 0.13 (Ω) I_{pf} at DB†: 3.5 (kA)

Confirmation of supply polarity: (✓) Phase sequence confirmed†: (✓)

SPD Details** Types: T1 (N/A) T2 (N/A) T3 (N/A) N/A (✓)

Status indicator checked (where functionality indicator is present): (N/A)

**SPD Type.

Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.

Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART B), (See Section 534 for further details).

Note that not all SPDs have visible functionality indication.

TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION

Supply to DB is from: MDB Oxwich. 12way TP+N. Main LV Switch Board - 5L1

Overcurrent protective device for the distribution circuit

BS (EN): (60947-2) Type: (MCCB) Nominal voltage: (400) V Rating: (80) A No. of phases: (3)

Associated RCD (if any)

BS (EN): (N/A) RCD Type: (N/A) I_{Δn}: (N/A) mA No. of poles: (N/A) Operating time: (N/A) ms

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**	Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live	Live / Earth	Test voltage DC			Operating time*	Test button	AFDD test button	
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂	(MΩ)	(MΩ)	(V)			(ms)	(✓)	(✓)	
	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
1L1	N/A	N/A	N/A	1.74	N/A	LIM	>2000	500	✓	1.87	29.8	✓	N/A	N/A
1L2	N/A	N/A	N/A	1.92	N/A	LIM	1636	500	✓	2.05	31.2	✓	N/A	N/A
1L3	N/A	N/A	N/A	1.41	N/A	LIM	>2000	500	✓	1.53	30	✓	N/A	N/A
2L1	N/A	N/A	N/A	1.42	N/A	LIM	>2000	500	✓	1.55	N/A	N/A	N/A	N/A
2L2	N/A	N/A	N/A	1.79	N/A	LIM	1618	500	✓	1.92	33.6	✓	N/A	N/A
2L3	N/A	N/A	N/A	1.42	N/A	LIM	1949	500	✓	1.54	29.6	✓	N/A	N/A
3L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
3L2	N/A	N/A	N/A	0.95	N/A	LIM	>2000	500	✓	1.08	N/A	N/A	N/A	N/A
3L3	N/A	N/A	N/A	0.55	N/A	LIM	>2000	500	✓	0.67	N/A	N/A	N/A	N/A
4L1	N/A	N/A	N/A	1.35	N/A	LIM	>2000	500	✓	1.48	N/A	N/A	N/A	N/A
4L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
4L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L1	N/A	N/A	N/A	0.91	N/A	LIM	>2000	500	✓	1.04	N/A	N/A	N/A	N/A
5L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
5L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
6L1	0.52	0.53	1.37	0.41	N/A	LIM	1992	500	✓	0.54	39.6	✓	N/A	N/A
6L2	0.34	0.34	0.92	0.31	N/A	LIM	601	500	✓	0.44	39.6	✓	N/A	N/A

Circuits/equipment vulnerable to damage when testing (where applicable): Lamps, Neons, RCDs, Electronic Equipment.

TESTED BY Name (capitals): LEE WELSHER Position: Electrician Signature: [Signature] Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)					
Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): N/A
---------------------------------	--	---	---	--	--	---------------------------------------	---------------------------------------	-------------------------------------	--------------------

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART A : SCHEDULE OF CIRCUIT DETAILS (GO TO Part B 'Schedule of Test Results' to enter test results for the corresponding circuit listed in this part)

Circuit number	Circuit description	Type of wiring (see footer to PART B)	Reference Method (BS 7671)	Number of points served	Circuit conductor (number & csa)		Max. disconnection time (BS 7671) (s)	Overcurrent protective device					RCD			
					Live (mm ²)	cpc (mm ²)		BS (EN)	Type	Rating (A)	Short-circuit capacity (kA)	Maximum permitted Zs* (Ω)	BS (EN)	Type	Rating (A)	Operating current, I _{Δn} (mA)
					6L3	Bedroom Ring Main - rooms 5-8		A	C	12	4	1.5	0.4	61009	C	32
7L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
7L2	Bedroom Ring Main - rooms 13-16	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
7L3	Bedroom Ring Main - rooms 1-4	A	C	12	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
8L1	Plantroom Sockets - top floor	A	C	3	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
8L2	Cooker Supply K1	A	C	2	10	4	0.4	61009	C	32	10	0.54	61009	A	32	30
8L3	Cooker Supply K2	A	C	2	10	4	0.4	61009	C	32	10	0.54	61009	A	32	30
9L1	NTL Hub Plantroom	A	C	1	4	1.5	0.4	60898	C	20	10	0.87	N/A	N/A	N/A	N/A
9L2	Kitchen Ring Main K1	A	C	7	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
9L3	Kitchen Ring Main K2	A	C	7	4	1.5	0.4	61009	C	32	10	0.54	61009	A	32	30
10L1	Plantroom Metering Interface IBMS	A	C	1	4	1.5	0.4	60898	C	20	10	0.87	N/A	N/A	N/A	N/A
10L2	Hob Supply K1	A	C	1	4	1.5	0.4	60898	C	25	10	0.70	N/A	N/A	N/A	N/A
10L3	Hob Supply K2	A	C	1	4	1.5	0.4	60898	C	25	10	0.70	N/A	N/A	N/A	N/A
11L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L3	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L1	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L2	Spare	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

<p>DISTRIBUTION BOARD (DB) DETAILS (complete in every case)</p> <p>DB5 Oxwich-Fourth Floor. DB designation: Lighting and Small Power..... Oxwich building - Fourth Location of DB: Floor, DB riser.....</p> <p>Z_{db}: 0.13..... (Ω) I_{pf} at DB†: 3.5..... (kA)</p> <p>Confirmation of supply polarity: (✓) Phase sequence confirmed†: (✓)</p> <p>SPD Details** Types: T1 (N/A) T2 (N/A) T3 (N/A) N/A (✓)</p> <p>Status indicator checked (where functionality indicator is present): (N/A) (.....)</p>	<p>**SPD Type.</p> <p>Where combined T1 + T2 or T2 + T3 device is installed, indicate by ticking both Type brackets.</p> <p>Where T3 devices are installed on a circuit to protect sensitive equipment, enter details in 'Comments' (PART B), (See Section 534 for further details).</p> <p>Note that not all SPDs have visible functionality indication.</p>	<p>TO BE COMPLETED ONLY IF THE DB IS NOT CONNECTED DIRECTLY TO THE ORIGIN OF THE INSTALLATION</p> <p>Supply to DB is from: MDB Oxwich. 12way TP+N. Main LV Switch Board - 5L1</p> <p>Overcurrent protective device for the distribution circuit</p> <p>BS (EN): (60947-2) Type: (MCCB) Nominal voltage: (400) V Rating: (80) A No. of phases: (3)</p> <p>Associated RCD (if any)</p> <p>BS (EN): (N/A) RCD Type: (N/A) I_{Δn}: (N/A) mA No. of poles: (N/A) Operating time: (N/A) ms</p>
--	---	---

Original (to the person ordering the work)

CONTINUATION SHEET : EIC and EICR

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

PART B : SCHEDULE OF TEST RESULTS (MUST reflect circuits entered into 'Schedule of Circuit Details' in Part A)

Circuit number	Continuity (Ω)					Insulation resistance			Polarity (✓)	Max. measured earth fault loop impedance, Z _s (Ω)	RCD		AFDD**	Comments and additional information, where required
	Ring final circuits only (measured end to end)			All circuits (complete at least one column)		Live / Live	Live / Earth	Test voltage DC			Operating time*	Test button	AFDD test button	
	(Line) r ₁	(Neutral) r _n	(cpc) r ₂	(R ₁ + R ₂)	R ₂	(MΩ)	(MΩ)	(V)			(ms)	(✓)	(✓)	
6L3	0.46	0.47	1.25	0.41	N/A	LIM	1498	500	✓	0.53	39.6	✓	N/A	N/A
7L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
7L2	0.36	0.36	1.00	0.31	N/A	LIM	310	500	✓	0.44	29.6	✓	N/A	N/A
7L3	0.49	0.49	1.27	0.40	N/A	LIM	1771	500	✓	0.52	39.2	✓	N/A	N/A
8L1	0.28	0.27	0.72	0.26	N/A	LIM	399	500	✓	0.39	28.8	✓	N/A	N/A
8L2	N/A	N/A	N/A	0.14	N/A	LIM	>2000	500	✓	0.27	29.2	✓	N/A	N/A
8L3	N/A	N/A	N/A	0.09	N/A	LIM	37.1	500	✓	0.21	29.2	✓	N/A	N/A
9L1	N/A	N/A	N/A	0.34	N/A	LIM	703	500	✓	0.47	N/A	N/A	N/A	N/A
9L2	0.38	0.37	0.99	0.31	N/A	LIM	484	500	✓	0.44	28.8	✓	N/A	N/A
9L3	0.23	0.22	0.65	0.24	N/A	LIM	227	500	✓	0.36	30.8	✓	N/A	N/A
10L1	N/A	N/A	N/A	0.44	N/A	LIM	>2000	500	✓	0.57	N/A	N/A	N/A	N/A
10L2	N/A	N/A	N/A	0.43	N/A	LIM	>2000	500	✓	0.57	N/A	N/A	N/A	N/A
10L3	N/A	N/A	N/A	0.19	N/A	LIM	>2000	500	✓	0.31	N/A	N/A	N/A	N/A
11L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
11L3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12L2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Circuits/equipment vulnerable to damage when testing (where applicable): Lamps, Neons, RCDs, Electronic Equipment.

TESTED BY Name (capitals): LEE WELSHER Position: Electrician Signature: [Signature] Date: 16/05/2024

TEST INSTRUMENTS (ENTER SERIAL NUMBER AGAINST EACH INSTRUMENT USED)					
Multi-function: C010471	Continuity: N/A	Insulation resistance: N/A	Earth fault loop impedance: N/A	Earth electrode resistance: N/A	RCD: N/A

* RCD effectiveness is verified using an alternating current test at rated residual operating current (I_{Δn}) ** Where installed. Note, not all AFDDs have a test function. Where a circuit contains an AFDD this should be stated in the field for that circuit in the 'Comments and additional information, where required' column.

CODES for Type of wiring	(A) Thermoplastic insulated / sheathed cables	(B) Thermoplastic cables in metallic conduit	(C) Thermoplastic cables in non-metallic conduit	(D) Thermoplastic cables in metallic trunking	(E) Thermoplastic cables in non-metallic trunking	(F) Thermoplastic / SWA cables	(G) Thermosetting / SWA cables	(H) Mineral-insulated cables	Other (state): N/A
--------------------------	---	--	--	---	---	--------------------------------	--------------------------------	------------------------------	--------------------

Original (to the person ordering the work)



This certificate is not valid if the serial number has been defaced or altered

29661887

N18.2c

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

9.2 Other special installations or locations

N/A

N/A

Original (to the person ordering the work)



This certificate is not valid if the serial number has been defaced or altered

29661887

N18.2c

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

10. Prosumer's low voltage installation

N/A

NA

Original (to the person ordering the work)



This certificate is not valid if the serial number has been defaced or altered

29661887

IFN18.2c

CONTINUATION SHEET: EICR

Issued in accordance with BS 7671: 2018+A2:2022 – Requirements for Electrical Installations

PART 5 : OBSERVATIONS

One of the following Codes, as appropriate, has been allocated to each of the observations made below to indicate to the person(s) responsible for the electrical installation the degree of urgency for remedial action:	Code C1 Danger Present Risk of injury. Immediate remedial action required	Code C2 Potentially Dangerous Urgent remedial action required	Code C3 Improvement Recommended	Code FI Further Investigation Required
---	---	---	---	--

Referring to the **Schedule of Items Inspected** (see PART 9), the attached **Schedule of Circuit Details and Test Results** (see PART 11A & 11B), and subject to any **agreed limitations** listed in PART 6 –

No remedial action is required (.....), OR The following observations are made:

Item No	Observation(s)	Code	Location Reference
(21)	6.8 Ring mains wired in 4mm/1.5mm T+E. CPC-CPC readings do not exceed 2.67 times the Live-Live readings.	(C3)	(DB5)
(.22)	6.7 ZS values for circuits 1L1 and 6L1 exceed the 80% maximum zs values in BS7671 but do not exceed the 100% values with 30mA RCD protection.	(C3)	(DB2)
(.23)	6.7 ZS values for circuits 6L2,6L3,7L1 exceed the 80% maximum zs values in BS7671 but do not exceed the 100% values with 30mA RCD protection	(C3)	(DB3)
(.24)	6.7 ZS values for circuits 6L3 exceed the 80% maximum zs values in BS7671 but do not exceed the 100% values with 30mA RCD protection.	(C3)	(DB4)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)
(.....)	(.....)	(.....)	(.....)

Additional pages? (.....) State page numbers: (.....)

Immediate action required for items: (N/A) Improvement recommended for items: (21,22,23,24)

Urgent remedial action required for items: (N/A) Further investigation required for items: (N/A)


Original (to the person ordering the work)

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

2

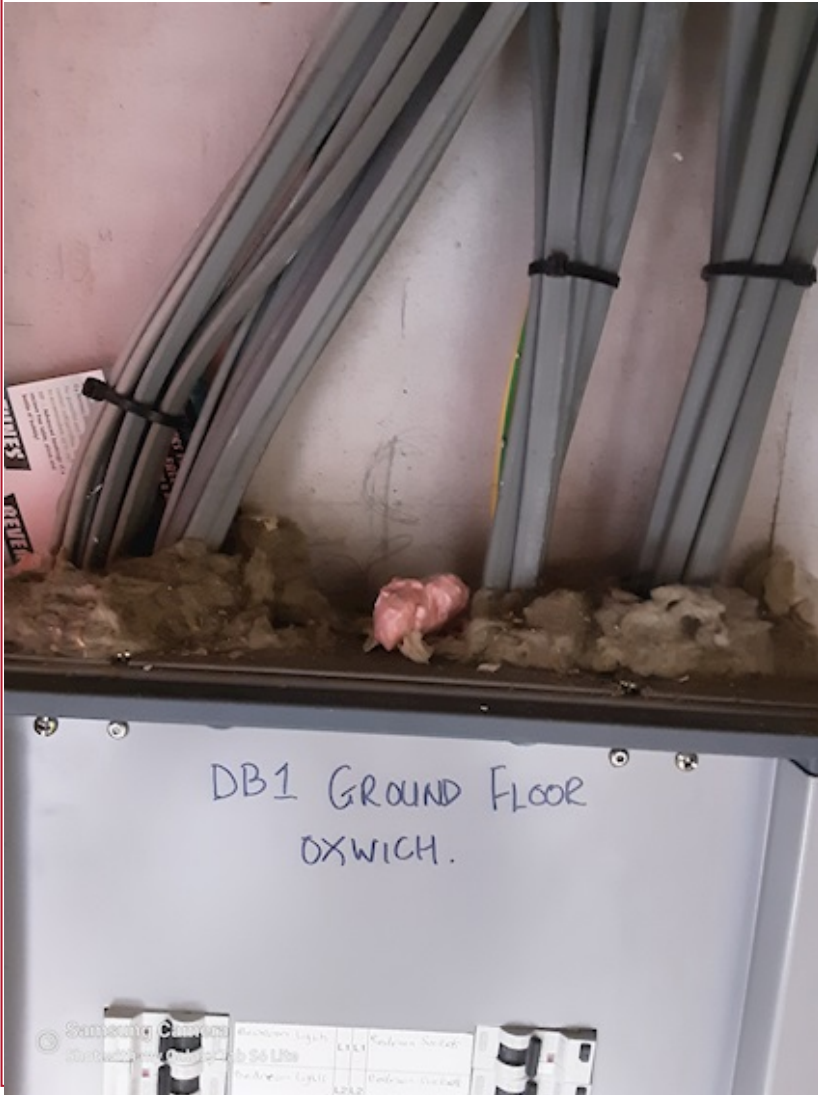

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

3



© Samsung Camera
Shot with my Galaxy Tab S6 Lite

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

21



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

9



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

9



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

19



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

21



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

Misc



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

Misc



© Samsung Camera
Shot with my Galaxy Tab S6 Lite

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

Misc



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

Misc



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

Misc



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

15



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

10




GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

11

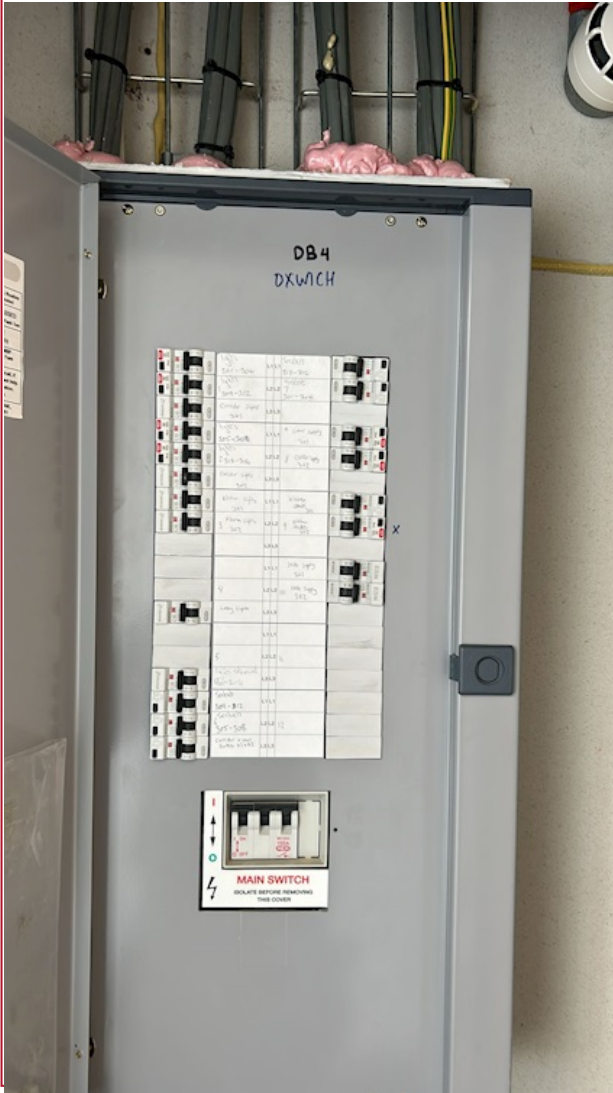

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 – Requirements for Electrical Installations

NOTES

MDB



Original (to the person ordering the work)

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

DB1



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

DB2



Original (to the person ordering the work)

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

DB3



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

DB4



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

DB5



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

11




GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

11

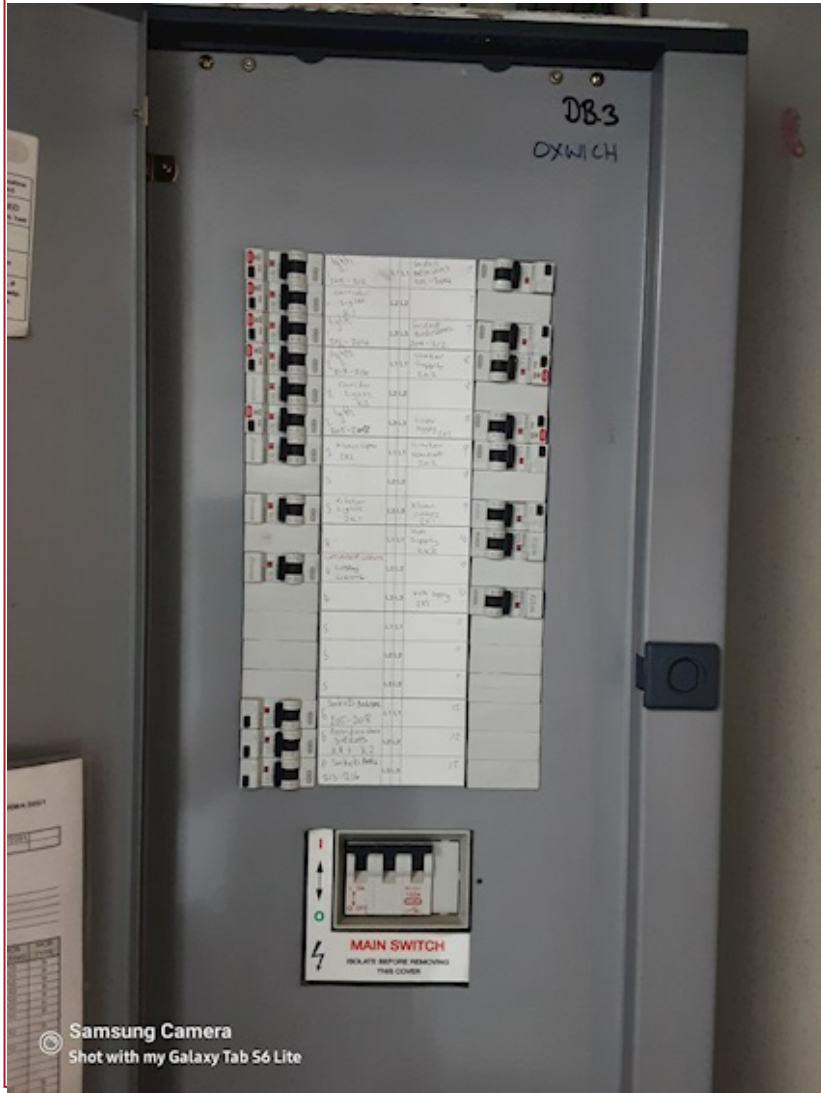


Original (to the person ordering the work)

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

11

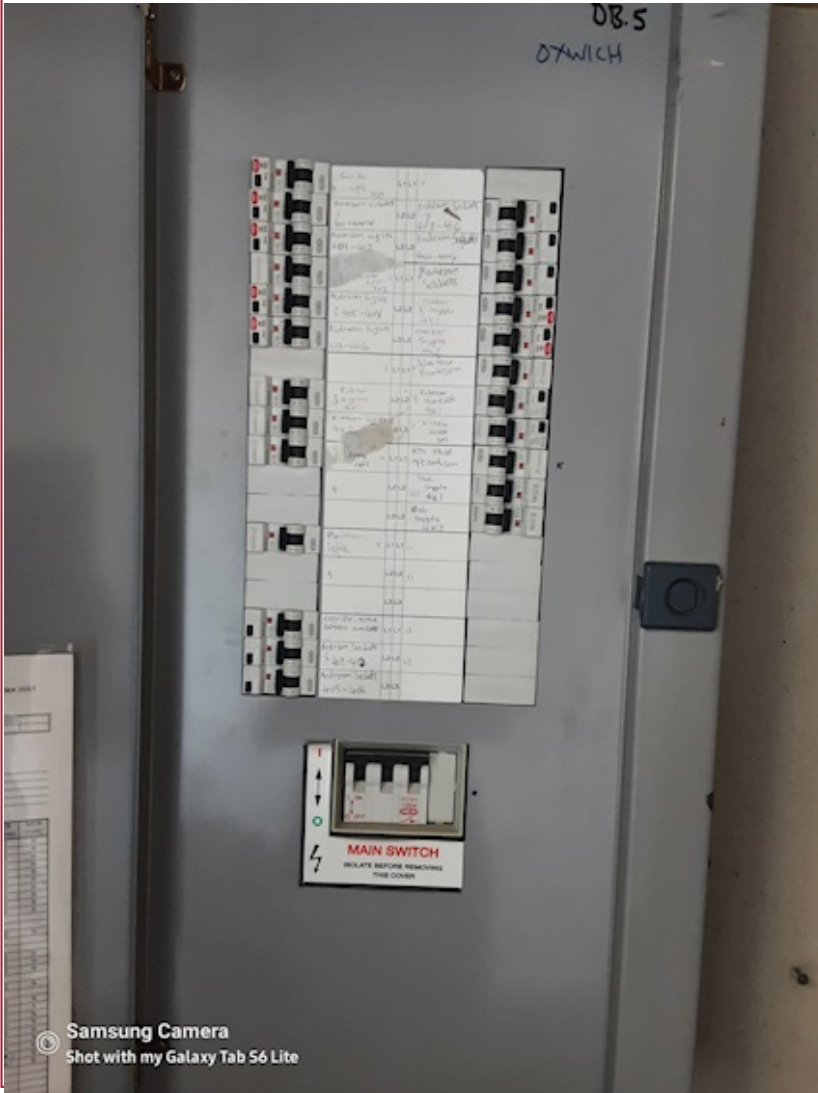

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

11



Original (to the person ordering the work)

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

5



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

1



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

6



Original (to the person ordering the work)

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

8



Samsung Camera
Shot with my Galaxy Tab S6 Lite

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

14



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

15



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

15



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

16



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

16



Original (to the person ordering the work)

GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

17



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

18



GENERAL CONTINUATION SHEET

Issued in accordance with BS 7671: 2018+A2:2022 - Requirements for Electrical Installations

NOTES

18



NOTES FOR RECIPIENT

THIS CONDITION REPORT IS AN IMPORTANT AND VALUABLE DOCUMENT WHICH SHOULD BE RETAINED FOR FUTURE USE

The purpose of periodic inspection is to determine, so far as is reasonably practicable, whether an electrical installation is in a satisfactory condition for continued service. This report provides an assessment of the condition of the electrical installation identified overleaf at the time it was inspected and tested, taking into account the stated extent of the installation and the limitations of the inspection and testing.

This report has been issued in accordance with the national standard for the safety of electrical installations, *BS 7671: 2018+A2:2022* – Requirements for Electrical Installations.

The report identifies any damage, deterioration, defects and/or conditions found by the inspector which may give rise to danger (see PART 5), together with any items for which improvement is recommended.

You should have received the report marked 'Original' and the contractor should retain a duplicate. If you were the person ordering this report, but not the owner or user of the installation, you should pass this report, or a full copy of it, including these notes, the schedules and additional pages (if any), immediately to the owner or user of the installation.

This report should be retained in a safe place and shown to any person inspecting or undertaking further work on the electrical installation in the future. If you later vacate the property, this report will provide the new user with an assessment of the condition of the electrical installation at the time the periodic inspection was carried out.

For safety reasons, the electrical installation should be re-inspected at appropriate intervals by a skilled person or persons, competent in such work. NICEIC* recommends that you engage the services of an NICEIC contractor for the inspection. Only an NICEIC contractor is authorised to issue this NICEIC Electrical Installation Condition Report, which has a unique serial number that is traceable to the contractor to which it was supplied by NICEIC.

The recommended date by which the next inspection should be carried out is stated in PART 4 of this report. With the exception of domestic (household) premises, there should also be a notice at or near the main switchboard or distribution board/consumer unit indicating when the next inspection of the installation is due.

This report is intended to be issued only for the purpose of reporting on the condition of an existing electrical installation and must not be issued to certify new electrical installation work including the replacement of a distribution board or consumer unit.

The report consists of at least eight numbered pages. The report is only valid if the Schedule of Items Inspected (PART 9) has been completed to confirm that all relevant inspections have been carried out and the Schedule of Circuit Details (PART 11A) and the Schedule of Test Results (PART 11B) are attached. For installations having more than one distribution board (or consumer unit) or more circuits than can be recorded in PARTS 11A & 11B, one or more additional Schedule of Circuit Details and Schedule of Test Results, should form part of the report. Additional numbered pages may have been provided to permit further relevant information relating to the installation to be recorded. The report is invalid if any of the additional pages, listed in PART 10 are missing.

Where the installation includes a residual current device (RCD) it should be tested every six months by pressing the button marked "T" or "Test". The device should switch off the supply and should then be switched on to restore the supply. If the device does not switch off the supply when the button is pressed, seek expert advice. For safety reasons it is important that this instruction is followed.

Where the installation includes an arc fault detection device (AFDD) having a manual test facility it should be tested six-monthly by pressing the test button. Where an AFDD has both a test button and automatic test function, manufacturer's instructions should be followed with respect to test button operation.

Where the installation includes a surge protection device (SPD) the status indicator should be checked to confirm it is in operational condition in accordance with manufacturer's information. If the indication shows that the device is not operational, seek expert advice.

Where the installation can be supplied by more than one source, such as the public supply and a standby generator or microgenerator, this should be identified in PART 7 Supply Characteristics and Earthing Arrangements, and the Schedules of Circuit Details and Test Results (PART 11A & 11B) compiled accordingly.

PART 6 (Details and limitations) should identify fully the extent of the installation covered by this report and any limitations on the inspection and testing. The inspector should have agreed these aspects with the person ordering the report and with other interested parties (licensing authority, insurance company, mortgage provider and the like) before the inspection was carried out.

Operational limitations may have been encountered during the inspection such as inability to gain access to parts of the installation or to an item of equipment. The inspector should have noted any such limitations in PART 6. It should be noted that the greater the limitations applying to a report, the less its value from the safety aspect.

A declaration should have been given by the inspector in PART 4 of the report. The declaration must reflect the statement given in PART 3, which summarises the observations and recommendations made in PART 5. Where one or more observations have been made in PART 5, the Classification code given to each by the inspector indicates the degree of urgency with which remedial action needs to be taken to restore the installation to a safe working condition.

Where the inspector has indicated an observation as code C1 (danger present) the safety of those using the installation is at risk. Wherever practicable, items classified as C1 should be made safe on discovery, and it is recommended that a skilled person(s) competent in electrical installation work undertakes the necessary remedial work immediately.

Where the inspector has indicated an observation as code C2 (potentially dangerous) the safety of those using the installation may be at risk, and it is recommended that a skilled person competent in electrical installation work undertakes the necessary remedial work as a matter of urgency.

Where the inspector has indicated that an item requires further investigation (FI), the investigation should be carried out without delay to determine whether danger or potential danger exists. For further guidance on the Classification codes, please see the reverse of page 2.

Where inadequacies in the intake equipment have been observed (Item 1 of PART 9), the person ordering the inspection should inform the distributor and/or supplier as appropriate.

Should the person ordering this report have reason to believe that it does not reasonably reflect the condition of the electrical installation reported on, that person should in the first instance raise the specific concerns in writing with the contractor. If the concerns remain unresolved, the person ordering this report may make a formal complaint to NICEIC, for which purpose a complaint form is available on request.

The complaints procedure offered by NICEIC is subject to certain terms and conditions, full details of which are available upon application. NICEIC does not investigate complaints relating to the operational performance of electrical installations (such as lighting levels), or to contractual or commercial issues (such as time or cost).

For further information about electrical safety and how NICEIC can help you, visit:

www.niceic.com

** NICEIC is operated by Certsure LLP, a partnership between the Electrical Contractors' Association and the charity, Electrical Safety First. NICEIC maintains and publishes registers of electrical contractors that it has assessed against particular scheme requirements (including the technical standard of electrical work).*

GUIDANCE FOR RECIPIENTS ON THE CLASSIFICATION CODES

ONLY ONE CLASSIFICATION CODE SHOULD BE GIVEN FOR EACH RECORDED OBSERVATION

Classification code C1 (Danger present)

Where an observation has been given a Classification code C1, the safety of those using the installation is at risk and immediate remedial action is required.

The person responsible for the maintenance of the installation is advised to take action without delay to remedy the observed deficiency in the installation, or to take other appropriate action (such as switching off and isolating the affected part(s) of the installation) to remove the danger. The NICEIC contractor issuing this report will be able to provide further advice.

NICEIC makes available 'Electrical Danger Notification' forms to enable inspectors to record, and then to communicate to the person ordering the report, any dangerous condition discovered.

Classification code C2 (Potentially dangerous)

Classification code C2 indicates that, whilst those using the installation may not be at immediate risk, urgent remedial action is required to remove potential danger. The NICEIC contractor issuing this report will be able to provide further advice.

It is important to note that the recommendation given for the next inspection date in PART 4 of this report is conditional upon all items which have been given a Classification code C1 and code C2 being remedied immediately and as a matter of urgency, respectively.

It would not be reasonable for the inspector to indicate that the installation is in a satisfactory condition if any observation in this report has been given a code C1 or code C2 classification.

Classification code C3 (Improvement recommended)

Where an observation has been given a Classification code C3, the inspection and/or testing has revealed a non-compliance with the current safety standard which, whilst not presenting immediate or potential danger, would result in a significant safety improvement if remedied. Careful consideration should be given to the safety benefits of improving these aspects of the installation. The NICEIC contractor issuing this report will be able to provide further advice.

Code FI (Further investigation required without delay)

It should usually be possible for the inspector to attribute a Classification code to each observation without indicating a need for further investigation.

However, where 'FI' has been entered against an observation the inspector considers that further investigation of that observation is likely to reveal danger or potential danger that, due to the agreed extent or limitations of the inspection and/or testing (entered in PART 6), could not be fully identified at the time.

It would not be appropriate for the inspector to indicate that the installation is in a satisfactory condition if there is reasonable doubt as to whether danger or potential danger exists. Consequently, where the inspector has indicated 'Further investigation required without delay' (FI) the overall assessment of the installation (PART 3) should be marked as 'Unsatisfactory'.

If the inspector has indicated that an observation requires further investigation without delay, the person ordering this report is advised to arrange for the NICEIC contractor issuing the report (or another skilled person or persons competent in such work) to undertake further examination of that aspect of the installation as a matter of urgency, to determine whether or not danger or potential danger exists.

Further information

Further information on the application of Classification codes, primarily aimed at inspectors but of possible interest to persons ordering condition reports, can be found in Electrical Safety First's Best Practice Guide No 4 *Electrical installation condition reporting: Classification Codes for domestic and similar electrical installations*. The guide can be viewed or downloaded free of charge from www.electricalsafetyfirst.org.uk

For further information about electrical safety and how NICEIC can help you, visit
www.niceic.com